



目录	页面	Contents	Page
ME系列斜齿-蜗杆减速机		ME Series Helical-worm Gear more and Gear Unit	
产品外形	367-367	Products Figure	367-367
型号标记	368-368	Designation	368-368
电机配置说明	368-369	Configuration of Electric Motor	368-369
安装位置	370-371	Mounting Position	370-371
技术参数	372-402	Technical Data	372-402
安装尺寸	403-432	Mounting Dimensions	403-432

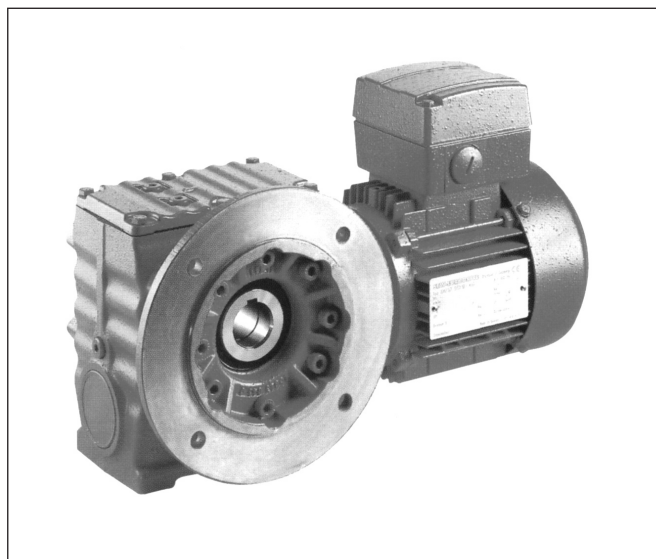


产品外形


Products Figure

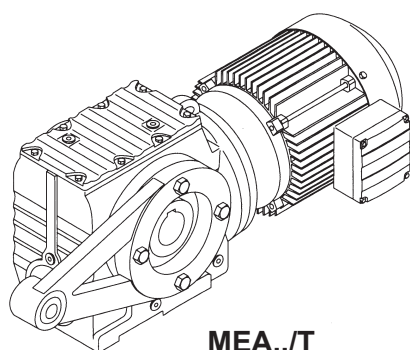


MEA../T

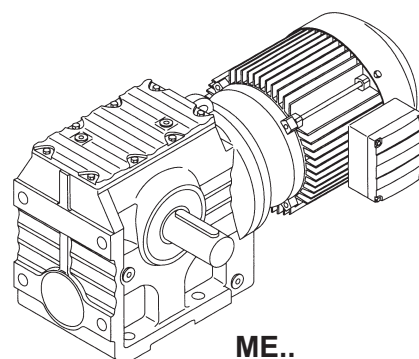


ME..




ME..S

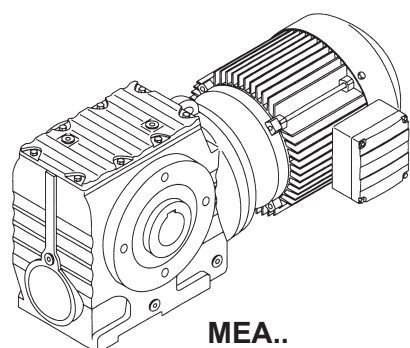


MEA..

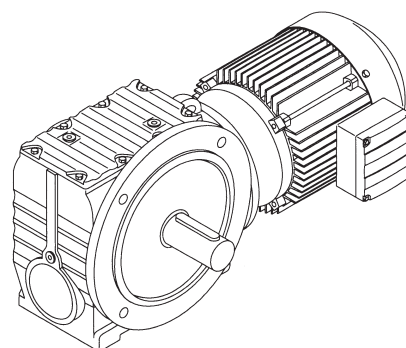


MEF..

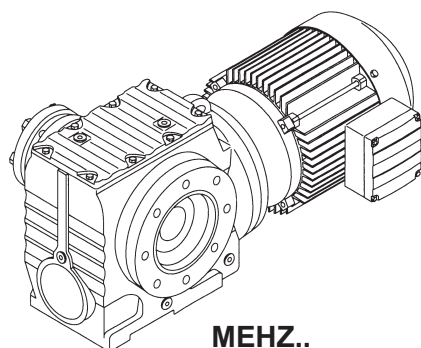


MEHZ..




MEAS..

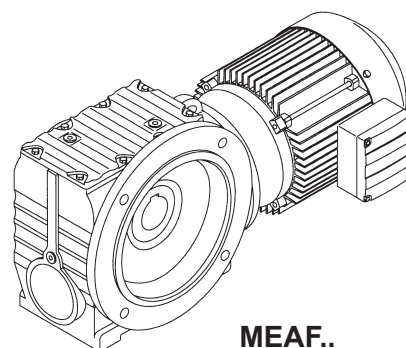

MEAF..

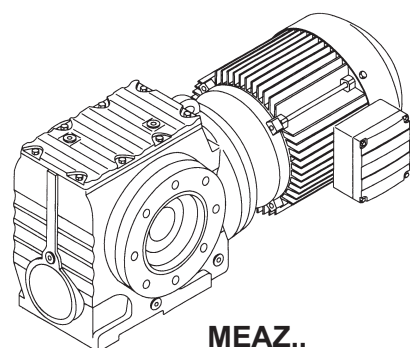


MEAZ..

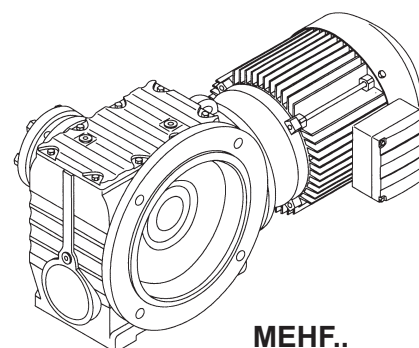

MEHF..

型号标记

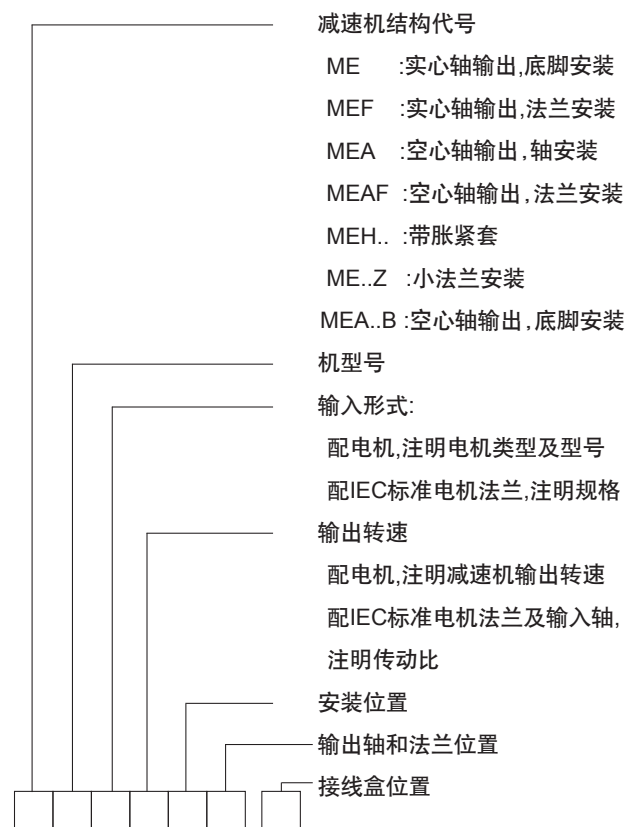

标记示例

- A MEA57Y100L1-4NA194M1-270 (φ35)
空心孔 φ 35输出,轴装式,机型号57,电机规格Y100L1-4,输出转速194rpm,安装位置M1,电机接线盒位置270°
- B MEA57BY100L1-4NA194M1-270(φ 30)
空心孔 φ 30输出,底脚安装,机型号57,电机规格Y100L1-4,输出转速194rpm,安装位置M1,电机接线盒位置270°
- C MEHF57YB100L1-4NA194M1A-270 (d || BT4,IP54/F; φ 35)
法兰安装,空心孔 φ 35带胀紧套输出,机型号57,防爆电机YB100L1-4,防爆等级d || BT4,防护等级IP54,绝缘等级F,输出转速194rpm,安装位置M1,输出法兰方向A,电机接线盒位置270°

电机配置说明

Y系列普通三相异步电机

- 1 本系列减速机标准配置Y系列普通三相异步感应电机;
- 2 电机电压: 380V/50Hz;
- 3 电机防护等级IP54, 绝缘等级F, B级温升;
- 4 环境温度不超过40℃, 不低于-15℃;
- 5 连续工作制S1;
- 6 海拔高度不超过1000m;

Designation

gear unit type

- ME :solid shaft,foot-mounted
- MEF :solid shaft,foot-mounted
- MEA :hollow shaft with key,shaft-mounted
- MEAF :hollow shaft with key,flange-mounted
- MEH :with shrink disk
- ME..Z :small flange mounting
- MEA..B :hollow shaft with key,foot-mounted

gear unit size

input structure:

- connect with motor, indicate motor model
- connect with IEC flange,indicate frame

output speed

- connect with motor,indicate output speed
- connect with IEC flange or with input shaft,
- indicate ratio

mounting position

output shaft and flange position

terminal box position

sign Example

- A MEA57Y100L1-4NA194M1-270 (φ 35)
hollow shaft φ 35,shaft mounted with,gear unit size57, motor frame Y100L1-4,output speed 194 rpm,mouting position M1,terminal box 270°
- B MEA57BY100L1-4NA194M1-270 (φ 30)
foot mounted,hollow shaft φ 30,gear unit size 57,motor frame Y100L1-4,output speed 194 rpm,mounting position M1,terminal box270°
- C MEHF57YB100L1-4NA194M1-270 (d || BT4,IP54/F; φ 35)
flange mounted,hollow shaft φ 35 with shrink disc,gear unit size 57,explosion proof motor frame 100L1-4,protect-ion IP54/F,output speed 194rpm,mounting position M1, output flange position A,terminal box270°

Configuration of Electric Motor

Y series Three-phase Asynchronous Electric Motor

- 1 this series gear unit configure three-phase asynchronous electric motor;
- 2 voltage:380V/50Hz;
- 3 protection class:IP54,insulation class:F; temperature rising class: B;
- 4 ambient temperature; -15~40℃;
- 5 continue working duty:S1;
- 6 altitude less than 1000m;

电机配置说明

Configuration of Electric Motor

Y系列普通三相异步电机

- 7 冷却方式为C0141（风扇自冷）；
- 8 100L2及以下规格为“Y”接法，112M及以上规格为“△”接法；
- 9 优先选用4，6，8极电机，2极电机不推荐使用；
- 10 电机技术参数见第433-438页

Y series Three-phase Asynchronous Electric Motor

- 7 self-cooling with fan:C0141;
- 8 within frame 100, follow connection Y, from frame 112, follow connection Δ ;
- 9 first select 4, 6, 8 poles motor;
- 10 technical data on page 433-438.

YEJ系列三相异步制动电机

- 1 三相异步制动电机为普通电机的基础上附加制动器；
- 2 电机电压：380V/50Hz；
- 3 制动器电压：规格71-100； DC99V
规格112-200； DC170V
- 4 配置单相AC220/50Hz整流器；
- 5 电机防护等级IP44，绝缘等级F，B级温升；
- 6 环境温度不超过40℃，不低于-15℃
- 7 连续工作制S1；
- 8 海拔高度不超过1000m；
- 9 冷却方式为C0141（风扇自冷）；
- 10 100及以下规格为“Y”接法，112M及以上规格为“△”接法；
- 11 优先选用4，6，8极电机，2极电机不推荐使用；
- 12 电机技术参数见第433-438页

YEJ series Three-phase Asynchronous Brake Motor

- 1 base on Y series motor, add a brake,
- 2 voltage: 380V 50Hz;
- 3 brake voltage: frame: 71~100 DC99V
frame: 112~200 DC170V;
- 4 with single phase AC220V/50Hz rectifier,
- 5 protection class: IP54, insulation class: F temperature rising
- 6 ambient temperature: -15~40℃
- 7 continue working duty: S1;
- 8 altitude less than 1000m;
- 9 self-cooling with fan: C141;
- 10 upon to frame 100, follow connection Y, from frame 112, follow connection Δ ;
- 11 first select 4, 6, 8 poles motor;
- 12 technical data on page 433-438.

VFG系列三相异步变频电机

- 1 电机电压：380V；
- 2 基准频率：50Hz；
- 3 允许调频5-50Hz，恒转矩调速；
- 4 电机防护等级IP54，绝缘等级F，B级温升；
- 5 环境温度不超过40℃，不低于-15℃
- 6 连续工作制S1；
- 7 海拔高度不超过1000m；
- 8 冷却方式为C416（独立风扇）；
- 9 接线方式按适配变频器要求；
- 10 优先选用4极电机。

VFG series Three-phase Variable-frequency Motor

- 1 voltage: 380V;
- 2 rated frequency 50Hz;
- 3 available frequency: 5-50Hz;
- 4 protection class: IP54, insulation class: F, temperature rising class: B;
- 5 ambient temperature: -15~40℃;
- 6 continue working duty: S1;
- 7 altitude less than 1000m;
- 8 cooling with independence fan: C416;
- 9 connection perform the requirement of inverter;
- 10 first select 4 poles motor;

特殊电机

- 1 选用包括防爆电机，辊道电机，船用电机，多速电机等特殊电机，
本公司提供IEC标准电机法兰接口，接口尺寸见431页；
- 2 异频率，异电压电机，请联系本公司技术部；
- 3 使用环境温度不在-15~40℃ 范围内，请联系本公司技术部；
- 4 更高的绝缘等级及防护等级，请联系本公司技术部。

Customized motor


- 1 others like explosion proof, roller motor, marine motor or multi-speed motor coupled by adaptor, the dimensions on page 431.
- 2 need different frequency and voltage, please contact us.
- 3 ambient temperature is out of -15~40℃, please contact us.
- 4 for higher insulation and protection class, please contact us.

安装尺寸

Mounting Dimensions


ME,MEAZ,MEHZ型减速机安装位置

ME,MEAZ,MEHZ type Gear Unit Mounting Position

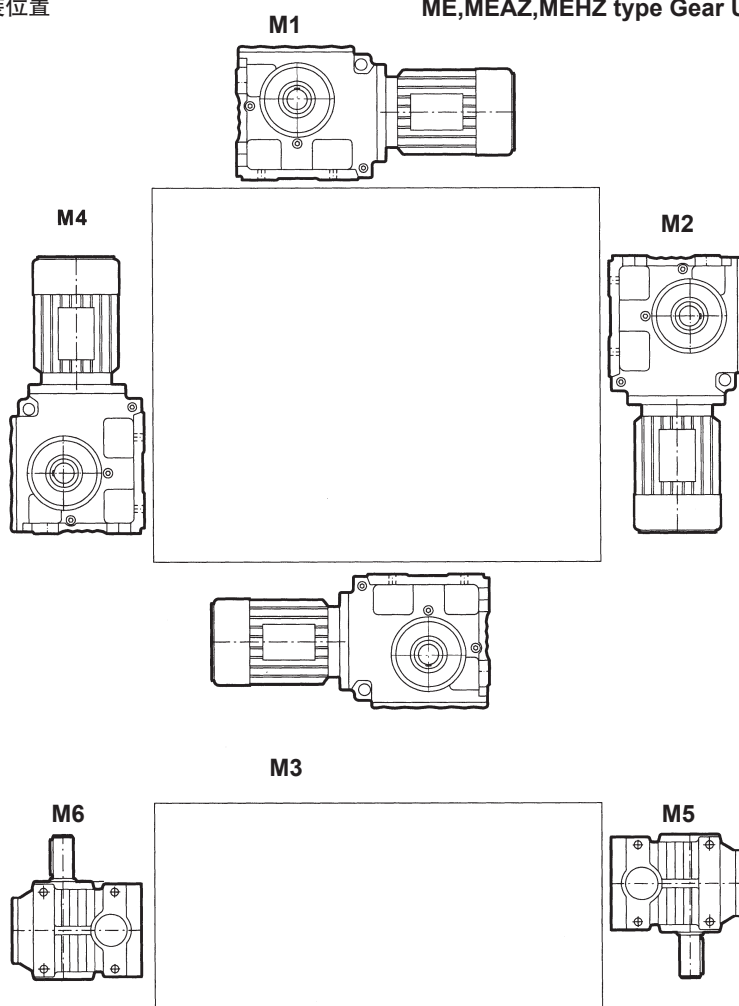


输出轴方向

Output Shaft Position

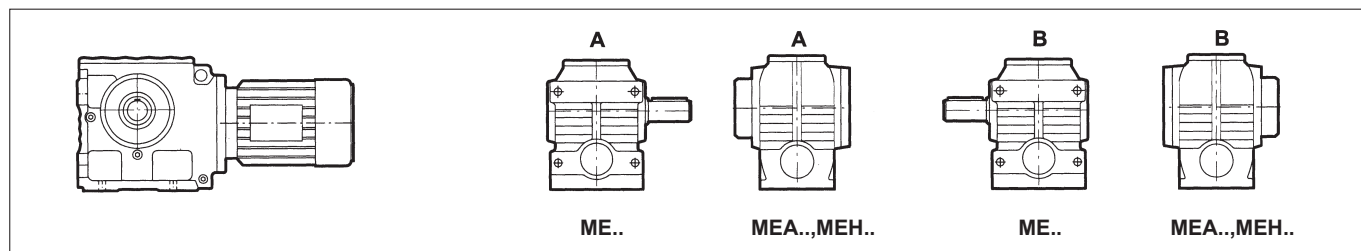

接线盒位置

Terminal Box Position

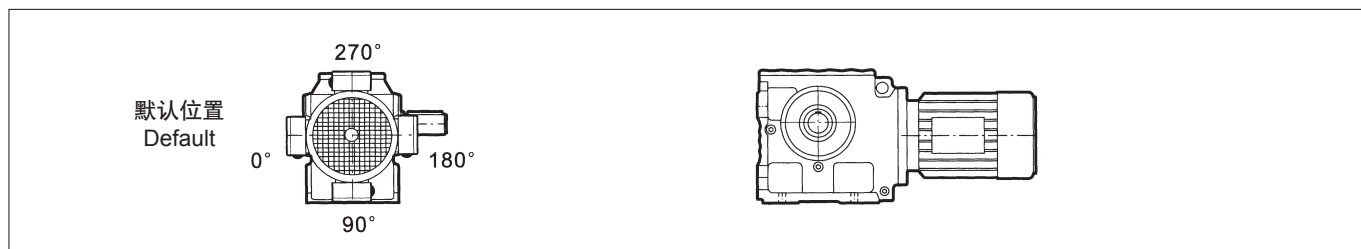


安装尺寸

Mounting Dimensions


MEF,MEAF,MEHF型减速机安装位置

MEF,MEAF,MEHF type Gear Unit Mounting Position

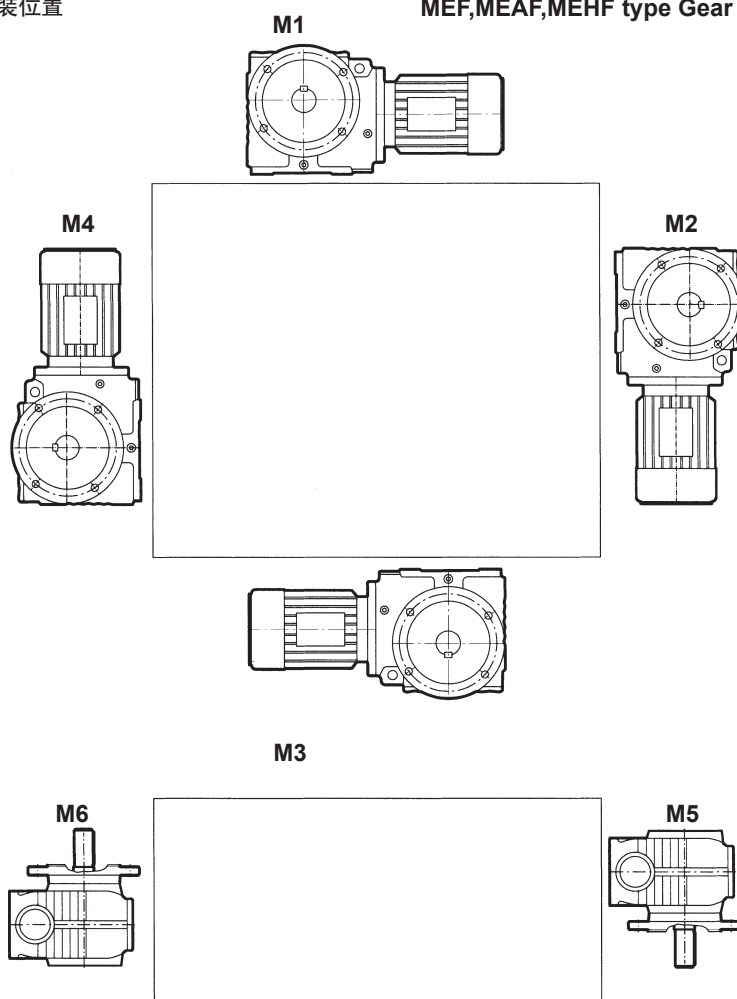


输出轴方向

Output Shaft Position

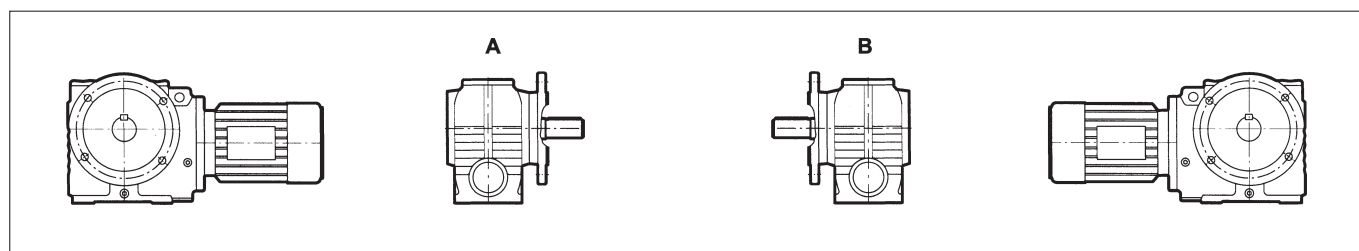

接线盒位置

Terminal Box Position

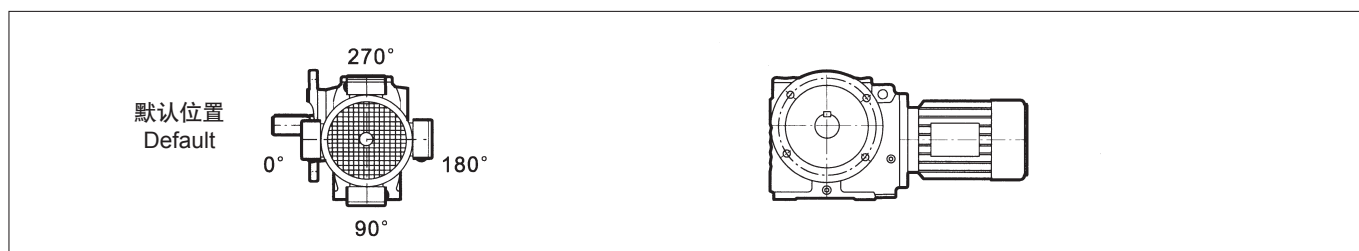

Technical Data

符号意义

Key to Symbols

1

$P_1 = 0.12 \text{ kW}$

Na rpm	M2 Nm	i	Fr2MAX[N]	fs	Type	Gear unit	Motor size	 Kg
0.12	4750	11267	25100	0.90	ME MEF MEA MEAF	97 MK57	63M1-4	170
0.14	4340	10078	32500	0.95		97 MK57	63M1-4	200
0.16	3600	8608	34000	1.15		97 MK57	63M1-4	165
0.18	3180	7554	34700	1.30		97 MK57	63M1-4	190

2

3

4

5

6

7

8

9

10

- 1 电机功率
- 2 输出转速
- 3 输出转矩
- 4 减速比
- 5 输出轴中最大点载荷
- 6 使用系数
- 7 减速机类型
- 8 减速机规格
- 9 电机型号
- 10 大概重量

- 1 motor power
- 2 output speed
- 3 output torque
- 4 transmission ratio
- 5 maximum load on middle output shaft
- 6 service factor
- 7 gear unit type
- 8 gear unit size
- 9 motor frame
- 10 approximate weight

技术参数

Technical Data

P₁=0.12 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
0.12	4750	11267	25100	0.90	ME	97 MK57	63M1-4	170
0.14	4340	10078	32500	0.95	MEF	97 MK57	63M1-4	200
0.16	3600	8608	34000	1.15	MEA	97 MK57	63M1-4	165
0.18	3180	7554	34700	1.30	MEAF	97 MK57	63M1-4	190
0.21	2690	6706	27100	0.95	ME	87 MK57	63M1-4	110
0.23	2400	5875	27700	1.05	MEF	87 MK57	63M1-4	130
0.27	1990	5187	28500	1.25	MEA	87 MK57	63M1-4	105
0.30	1770	4606	28800	1.40	MEAF	87 MK57	63M1-4	120
0.36	1470	3872	29200	1.70				
0.39	1370	3540	7240	0.90				
0.45	1200	3098	12300	1.05				
0.58	1330	2374	10600	0.95	ME	77 MK37	63M1-4	59
0.66	1170	2083	12600	1.05	MEF	77 MK37	63M1-4	68
0.76	990	1813	13900	1.25	MEA	77 MK37	63M1-4	58
0.79	940	1745	14200	1.30	MEAF	77 MK37	63M1-4	65
0.86	860	1600	14600	1.45				
0.98	755	1404	15100	1.65				
1.1	660	1245	15500	1.90				
1.2	590	1194	7990	0.95	ME	67 MK37	63M1-4	39
1.3	530	1045	8560	1.05	MEF	67 MK37	63M1-4	46
1.5	460	914	9180	1.25	MEA	67 MK37	63M1-4	40
					MEAF	67 MK37	63M1-4	45
1.7	420	809	9460	1.35				
1.9	370	712	9780	1.55				
2.2	305	615	10100	1.85	ME	67 MK37	63M1-4	39
2.5	275	543	10200	2.1	MEF	67 MK37	63M1-4	46
2.9	225	469	10400	2.5	MEA	67 MK37	63M1-4	40
3.3	205	424	10500	2.8	MEAF	67 MK37	63M1-4	45
3.8	187	365	10500	3.0				
2.1	330	655	6800	0.90				
2.4	285	574	7200	1.05				
2.7	250	506	7480	1.20	ME	57 MK17	63M1-4	20
3.1	215	438	7700	1.40	MEF	57 MK17	63M1-4	24
3.6	189	388	7850	1.60	MEA	57 MK17	63M1-4	20
4.1	169	336	7950	1.80	MEAF	57 MK17	63M1-4	23
4.7	145	294	8050	2.1				
5.1	139	269	8070	2.2				
3.1	215	438	5010	0.85				
3.6	189	388	5170	1.00	ME	47 MK17	63M1-4	17
4.1	169	336	5290	1.10	MEF	47 MK17	63M1-4	20
4.7	143	294	5420	1.30	MEA	47 MK17	63M1-4	18
5.4	98	257	5670	1.90	MEAF	47 MK17	63M1-4	19
6.0	118	229	5550	1.55				

技术参数

Technical Data

P₁=0.12 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
6.9	102	200	5610	1.80	ME	47 MK17	63M1-4	17
7.4	96	187	5640	1.95	MEF	47 MK17	63M1-4	20
					MEA	47 MK17	63M1-4	18
					MEAF	47 MK17	63M1-4	19
6.8	103	202	3000	0.90	ME	37 MK17	63M1-4	14
7.7	91	179	3000	1.00	MEF	37 MK17	63M1-4	15
8.7	82	158	3000	1.15	MEA	37 MK17	63M1-4	13
9.6	75	144	3000	1.20	MEAF	37 MK17	63M1-4	15
12	61	118	3000	1.50				
13	57	110	3000	1.60				
4.5	143	201.00	8050	2.1	ME	57	63M2-6	17
4.9	133	184.80	8090	2.3	MEF	57	63M2-6	21
5.7	116	158.12	8150	2.5	MEA	57	63M2-6	17
6.6	103	137.05	8180	2.9	MEAF	57	63M2-6	20
4.5	138	201.00	5490	1.30	ME	47	63M2-6	14
4.9	129	184.80	5540	1.40	MEF	47	63M2-6	17
5.7	112	158.12	5610	1.55	MEA	47	63M2-6	15
6.6	99	137.05	5660	1.75	MEAF	47	63M2-6	16
7.0	93	128.10	5680	1.85				
6.9	95	201.00	5680	1.80	ME	47	63M1-4	14
7.5	89	184.80	5700	1.90	MEF	47	63M1-4	17
8.7	77	158.12	5740	2.2	MEA	47	63M1-4	15
10	68	137.05	5780	2.5	MEAF	47	63M1-4	16
11	64	128.10	5790	2.6				
12	57	110.73	5810	3.0				
5.7	5.7	157.43	3000	0.85	ME	37	63M2-6	11
6.2	6.2	144.40	3000	0.95	MEF	37	63M2-6	12
7.3	7.3	122.94	3000	1.05	MEA	37	63M2-6	10
8.5	8.5	106.00	3000	1.20	MEAF	37	63M2-6	12
9.1	9.1	98.80	3000	1.30				
10	10	86.36	3000	1.45				
8.8	74	157.43	3000	1.25	ME	37	63M1-4	11
9.6	68	144.40	3000	1.35	MEF	37	63M1-4	12
11	60	122.94	3000	1.55	MEA	37	63M1-4	10
13	52	106.00	3000	1.70	MEAF	37	63M1-4	12
14	49	98.80	3000	1.75				
16	44	86.36	3000	1.95				
17	41	80.96	3000	2.1				

技术参数

Technical Data

P₁=0.12 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
19	37	71.44	3000	2.3	ME MEF MEA MEAF	37	63M1-4	14
22	33	63.33	3000	2.5				
25	35	55.93	3000	2.3				
27	33	51.30	3000	2.5				
32	28	43.68	3000	2.9				
37	25	37.66	3000	3.2				
39	23	35.10	3000	3.4				
45	20	30.68	3000	3.7				
48	19	28.76	3000	3.9				
54	17	25.38	3000	4.4				
61	15	22.50	3000	4.8				
69	14	19.89	3000	3.6				
76	13	18.24	3000	3.9				
89	11	15.53	2870	4.4				

P₁=0.18 kW

0.29	3010	4606	19200	0.85	ME	87 MK57	63M2-4	110
0.34	2520	3872	27500	1.00	MEF	87 MK57	63M2-4	130
					MEA	87 MK57	63M2-4	105
					MEAF	87 MK57	63M2-4	120
0.38	2430	3475	27700	1.05				
0.45	2030	2905	28400	1.25	ME	87 MK57	63M2-4	105
0.51	1760	2586	28800	1.40	MEF	87 MK57	63M2-4	130
0.57	1570	2335	29100	1.60	MEA	87 MK57	63M2-4	105
0.64	1360	2054	29300	1.85	MEAF	87 MK57	63M2-4	120
0.72	1210	1824	29500	2.1				
0.81	1080	1631	29600	2.3				
0.94	1250	1404	11900	1.00	ME	77 MK37	63M2-4	59
1.1	1100	1245	13200	1.15	MEF	77 MK37	63M2-4	68
					MEA	77 MK37	63M2-4	58
					MEAF	77 MK37	63M2-4	65
1.2	1020	1100	13700	1.20				
1.4	880	954	14500	1.40	ME	77 MK37	63M2-4	59
1.6	770	837	15000	1.60	MEF	77 MK37	63M2-4	68
1.9	640	714	15600	1.95	MEA	77 MK37	63M2-4	58
2.1	570	637	15800	2.2	MEAF	77 MK37	63M2-4	65
2.3	515	574	16000	2.4				
1.9	600	712	7860	0.95				
2.1	505	615	8800	1.15	ME	67 MK37	63M2-4	39
2.4	450	543	9230	1.25	MEF	67 MK37	63M2-4	46
2.8	380	469	9720	1.50	MEA	67 MK37	63M2-4	40
3.1	340	424	9930	1.65	MEAF	67 MK37	63M2-4	45
3.6	305	365	10100	1.85				

技术参数

Technical Data

P₁=0.18 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
3.0	355	438	6520	0.85	ME MEF MEA MEAF	57 MK17	63M2-4	20 24 20 23
3.4	315	388	6970	0.95				
3.9	275	336	7290	1.10				
4.5	240	294	7560	1.25				
4.9	225	269	7650	1.35				
5.8	193	229	7830	1.55				
6.5	174	204	7930	1.75				
7.0	159	187	7990	1.90				
4.5	235	294	4480	0.80	ME MEF MEA MEAF	47 MK17	63M2-4	17 20 18 19
5.1	162	257	5380	1.15				
5.8	190	229	5170	0.95				
6.6	167	200	5300	1.10				
7.0	156	187	5360	1.20				
8.0	138	165	5450	1.35				
9.0	124	148	5520	1.50				
10	110	131	5580	1.70				
4.0	255	217.41	10300	2.2	ME MEF MEA MEAF	67	71M1-6	29 35 30 34
4.6	225	190.11	10400	2.5				
4.8	215	180.60	10400	2.6				
4.3	220	201.00	7670	1.35	ME MEF MEA MEAF	57	71M1-6	18 22 18 21
4.7	205	184.80	7760	1.45				
5.5	180	158.12	7900	1.65				
6.4	159	137.05	7990	1.85				
6.6	154	201.00	8010	1.90	ME MEF MEA MEAF	57	63M2-4	17 21 17 20
7.1	143	184.80	8050	2.1				
8.3	125	158.12	8120	2.4				
9.6	110	137.05	8160	2.7				
4.3	215	201.00	5090	0.85	ME MEF MEA MEAF	47	71M1-6	14 18 15 17
4.7	199	184.80	5180	0.90				
5.5	173	158.12	5320	1.00				
6.4	153	137.05	5420	1.10				
6.8	144	128.10	5470	1.20				
6.6	149	201.00	5440	1.15	ME MEF MEA MEAF	47	63M2-4	14 17 15 18
7.1	138	184.80	5490	1.25				
8.3	121	158.12	5570	1.40				
9.6	107	137.05	5630	1.60				
10	100	128.10	5660	1.65				
12	88	110.73	5700	1.90				
14	77	94.08	5750	2.2				
16	69	84.00	5770	2.4				
18	60	71.75	5800	2.8				
19	69	69.39	5750	2.2				

技术参数

Technical Data

P₁=0.18 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
8.4	115	157.43	3000	0.80	ME MEF MEA MEAF	37	63M2-4	11
9.1	107	144.40	3000	0.85				
11	93	122.94	3000	1.00				
12	82	106.00	3000	1.10				
13	77	98.80	3000	1.15				
15	68	86.36	3000	1.25				
16	64	80.96	3000	1.30				
18	58	71.44	3000	1.45				
21	52	63.33	3000	1.60				
24	55	55.93	3000	1.45				
26	51	51.30	3000	1.60				
30	44	43.68	3000	1.85				
35	38	37.66	3000	2.1				
38	36	35.10	3000	2.2				
43	32	30.68	3000	2.4				
46	30	28.76	3000	2.5				
52	27	25.38	3000	2.8				
59	24	22.50	3000	3.1				
66	22	19.89	3000	2.3				
72	21	18.24	2940	2.5				
85	18	15.53	2810	2.8				
99	15	13.39	2700	3.2				
106	14	12.48	2650	3.4				
121	13	10.91	2550	3.8				
129	12	10.23	2500	4.0				

P₁=0.25 kW

0.45	2930	2905	22200	0.85	ME MEF MEA MEAF	87 MK57	71M1-4	110
0.50	2560	2586	27400	1.00				
0.56	2300	2335	27900	1.10				
0.63	2000	2054	28400	1.25				
0.71	1770	1824	28800	1.40				
0.80	1590	1631	29100	1.60				
1.4	930	930	29700	2.7				
1.4	1260	954	11800	1.00	ME MEF MEA MEAF	77 MK37	71M1-4	59
1.6	1110	837	13100	1.10				
1.8	930	714	14200	1.35				
2.0	820	637	14800	1.50				
2.3	745	574	15200	1.65				
2.6	640	499	15600	1.95				
2.4	650	543	6280	0.85	ME MEF MEA MEAF	67 MK37	71M1-4	40
2.8	550	469	8390	1.05				
3.1	495	424	8880	1.15				

技术参数

Technical Data

P₁=0.25 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
3.6	440	365	9320	1.30	ME	67 MK37	71M1-4	40
4.1	380	319	9700	1.50	MEF	67 MK37	71M1-4	46
4.6	335	281	9960	1.70	MEA	67 MK37	71M1-4	41
					MEAF	67 MK37	71M1-4	45
4.4	345	294	6640	0.85	ME	57 MK17	71M1-4	21
4.8	320	269	6870	0.95	MEF	57 MK17	71M1-4	25
5.7	275	229	7280	1.10	MEA	57 MK17	71M1-4	21
6.4	250	204	7490	1.20	MEAF	57 MK17	71M1-4	24
6.9	230	187	7630	1.30				
7.9	200	165	7780	1.50				
9.9	162	131	7980	1.85				
3.1	435	217.41	9350	1.30	ME	67	80M2-8	33
3.6	390	190.11	9670	1.45	MEF	67	80M2-8	40
3.8	370	180.60	9770	1.50	MEA	67	80M2-8	34
4.3	330	158.45	9980	1.70	MEAF	67	80M2-8	39
4.0	350	217.41	9890	1.60	ME	67	71M2-6	30
4.6	310	190.11	10100	1.80	MEF	67	71M2-6	37
4.9	295	180.60	10100	1.90	MEA	67	71M2-6	31
5.5	265	158.45	10300	2.1	MEAF	67	71M2-6	36
6.0	245	217.41	10300	2.1				
6.8	220	190.11	10400	2.4	ME	67	71M1-4	29
7.2	210	180.60	10500	2.5	MEF	67	71M1-4	35
8.2	187	158.45	10500	2.8	MEA	67	71M1-4	30
9.7	161	134.40	10600	3.2	MEAF	67	71M1-4	34
11	147	121.33	10600	3.5				
12	131	106.75	10700	4.0				
4.4	305	201.00	7050	1.00	ME	57	71M2-6	19
4.8	285	184.80	7230	1.05	MEF	57	71M2-6	23
5.6	245	158.12	7510	1.20	MEA	57	71M2-6	19
6.4	220	137.05	7690	1.35	MEAF	57	71M2-6	22
6.9	205	128.10	7760	1.45				
6.5	2154	201.00	7700	1.35				
7.0	200	184.80	7790	1.45	ME	57	71M1-4	18
8.2	176	158.12	7920	1.70	MEF	57	71M1-4	22
9.5	155	137.05	8010	1.90	MEA	57	71M1-4	18
10	146	128.10	8040	2.0	MEAF	57	71M1-4	21
12	129	110.73	8110	2.3				
14	111	94.08	8160	2.7				
15	101	84.00	8190	2.9				
6.5	210	201.00	5120	0.80	ME	47	71M1-4	14
7.0	195	184.80	5210	0.85	MEF	47	71M1-4	18
					MEA	47	71M1-4	15
					MEAF	47	71M1-4	17

技术参数

Technical Data

P₁=0.25 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
8.2	170	158.12	5340	1.00	ME	47	71M1-4	14
9.5	150	137.05	5440	1.10	MEF	47	71M1-4	18
10	141	128.10	5480	1.20	MEA	47	71M1-4	15
12	124	110.73	5560	1.35	MEAF	47	71M1-4	17
14	108	94.08	5630	1.55				
15	98	84.00	5670	1.70				
18	85	71.75	5720	1.95	ME	47	71M1-4	14
19	97	69.39	5640	1.60	MEF	47	71M1-4	18
19	80	67.20	5740	2.1	MEA	47	71M1-4	15
20	90	63.80	5670	1.70	MEAF	47	71M1-4	17
24	78	54.59	5720	2.0				
27	68	47.32	5760	2.3				
13	108	98.80	3000	0.80				
15	96	86.36	3000	0.90				
16	91	80.96	3000	0.95				
18	81	71.44	3000	1.05				
21	78	63.33	3000	1.10				
23	73	55.93	3000	1.05				
25	72	51.30	3000	1.15				
30	62	43.68	3000	1.30				
35	54	37.66	3000	1.45				
37	51	35.10	3000	1.55				
42	45	30.68	3000	1.70	ME	37	71M1-4	11
45	42	28.76	3000	1.80	MEF	37	71M1-4	13
51	37	25.38	3000	2.0	MEA	37	71M1-4	11
58	33	22.50	3000	2.2	MEAF	37	71M1-4	13
65	32	19.89	2870	1.65				
71	29	18.24	2820	1.80				
84	25	15.53	2710	2.0				
97	22	13.39	2620	2.3				
104	20	12.48	2570	2.4				
119	18	10.91	2480	2.7				
127	17	10.23	2440	2.8				
144	15	9.02	2360	3.1				
163	13	8.00	2290	3.4				
191	11	6.80	2180	3.8				
92	21	28.76	2740	3.0				
105	19	25.38	2650	3.3	ME	37	62M2-2	11
118	17	22.50	2560	3.4	MEF	37	62M2-2	12
134	16	19.89	2410	2.8	MEA	37	62M2-2	10
146	15	18.24	2350	3.0	MEAF	37	62M2-2	12
171	13	15.53	2250	3.4				
199	11	13.39	2160	3.8				
213	10	12.48	2120	4.0				

技术参数

Technical Data

P₁=0.37 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
0.67	2860	2054	24500	0.90	ME	87 MK57	71M2-4	110
0.76	2540	1824	27400	1.00	MEF	87 MK57	71M2-4	130
0.85	2270	1631	28000	1.10	MEA	87 MK57	71M2-4	105
1.5	1340	930	29400	1.85	MEAF	87 MK57	71M2-4	125
1.7	1210	831	29500	2.1				
1.9	1310	714	11300	0.95	ME	77 MK37	71M2-4	60
2.2	1170	637	12600	1.05	MEF	77 MK37	71M2-4	70
2.4	1060	574	13400	1.15	MEA	77 MK37	71M2-4	59
2.8	910	499	14300	1.35	MEAF	77 MK37	71M2-4	66
3.1	800	438	14900	1.55				
3.6	710	389	15300	1.75				
3.8	625	365	7560	0.90	ME	67 MK37	71M2-4	41
4.3	545	319	8450	1.05	MEF	67 MK37	71M2-4	47
4.9	480	281	9030	1.20	MEA	67 MK37	71M2-4	42
5.6	430	246	9380	1.30	MEAF	67 MK37	71M2-4	46
2.4	980	288.00	29700	2.5	ME	87	90S-8	95
2.6	890	258.18	29800	2.8	MEF	87	90S-8	115
3.1	775	222.40	29900	3.2	MEA	87	90S-8	93
					MEAF	87	90S-8	110
3.0	735	225.26	15200	1.75	ME	77	90S-8	59
3.2	700	214.00	15300	1.80	MEF	77	90S-8	69
3.6	630	189.09	15600	2.0	MEA	77	90S-8	59
4.2	545	161.60	15900	2.3	MEAF	77	90S-8	66
3.5	645	256.47	15600	2.0	ME	77	80M1-6	52
4.0	575	225.26	15800	2.2	MEF	77	80M1-6	62
4.2	545	214.00	15900	2.3	MEA	77	80M1-6	52
					MEAF	77	80M1-6	59
4.1	505	217.41	8810	1.10	ME	67	80M1-6	32
4.7	450	190.11	9260	1.25	MEF	67	80M1-6	39
5.0	430	180.60	9400	1.30	MEA	67	80M1-6	33
5.7	380	158.45	9700	1.45	MEAF	67	80M1-6	38
6.4	345	217.41	9900	1.50	ME	67	71M2-4	30
7.3	310	190.11	10100	1.70	MEF	67	71M2-4	37
7.6	295	180.60	10200	1.75	MEA	67	71M2-4	31
8.7	260	158.45	10300	2.0	MEAF	67	71M2-4	36
10	225	134.40	10400	2.3				
11	205	121.33	10500	2.5				

技术参数

Technical Data

P₁=0.37 kW

Na rpm	M2 Nm	i	Fr2MAX[N]	fs	Type	Gear unit	Motor size	 Kg
5.7	360	158.12	6490	0.80	ME MEF MEA MEAF	57	80M1-6	19 23 19 22
6.6	315	137.05	6930	0.95				
7.0	300	128.10	7100	1.00				
8.1	265	110.73	7390	1.10				
9.6	230	94.08	7630	1.30				
11	205	84.00	7760	1.45				
6.9	305	201.00	7050	0.95	ME MEF MEA MEAF	57	71M2-4	19 23 19 22
7.5	285	184.80	7230	1.05				
8.7	245	158.12	7510	1.20				
10	220	137.05	7690	1.35				
11	205	128.10	7770	1.45				
12	180	110.73	7900	1.65				
15	156	94.08	8000	1.90				
16	141	84.00	8060	2.1				
19	122	71.75	8130	2.4				
20	139	69.39	8070	1.75				
21	115	67.20	8150	2.5				
22	128	63.80	8110	1.90				
10	210	137.05	5110	0.80	ME MEF MEA MEAF	47	71M2-4	15 19 16 18
11	199	128.10	5190	0.85				
12	175	110.73	5320	0.95				
15	151	94.08	5430	1.10				
16	137	84.00	5500	1.20				
19	119	71.75	5580	1.40				
20	136	69.39	5460	1.15				
21	112	67.20	5610	1.50				
22	126	63.80	5510	1.25				
25	109	54.59	5590	1.40				
29	96	47.32	5410	1.60				
31	90	44.22	5330	1.75				
36	78	38.23	5140	2.0				
42	67	32.48	4930	2.3				
48	60	29.00	4790	2.6				
56	52	24.77	4590	3.0				
59	49	23.20	4510	3.1				
68	46	20.33	4180	2.4				
78	40	17.62	4030	2.8				
84	37	16.47	3960	3.0				
22	103	63.33	3000	0.80	ME MEF MEA MEAF	37	71M2-4	12 14 12 13
27	101	51.30	3000	0.80				
32	87	43.68	3000	0.95				
37	76	37.66	3000	1.05				
39	71	35.10	3000	1.10				
45	63	30.68	3000	1.20				

技术参数

Technical Data

P₁=0.37 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
48	59	28.76	3000	1.30	ME MEF MEA MEAF	37	71M2-4	12
54	52	25.38	2940	1.40				
61	47	22.50	2870	1.55				
69	44	19.89	2610	1.20				
76	41	18.24	2570	1.30				
89	35	15.53	2500	1.45				
103	30	13.39	2420	1.60				
111	28	12.48	2390	1.70				
127	25	10.91	2320	1.95				
135	23	10.23	2280	2.0				
153	21	9.02	2220	2.2				
173	18	8.00	2150	2.5				
203	16	6.80	2070	2.7				
104	28	25.38	2540	2.2	ME MEF MEA MEAF	37	71M1-2	11
118	25	22.50	2460	2.3				
133	24	19.89	2290	1.85				
145	22	18.24	2250	2.0				
171	19	15.53	2160	2.3				
198	16	13.39	2080	2.6				
212	15	12.48	2040	2.7				
243	13	10.91	1970	3.0				
259	12	10.23	1940	3.1				
294	11	9.02	1870	3.3				

P₁=0.55 kW

1.0	2850	1332	24800	0.90	ME MEF MEA MEAF	87MK57	80M1-4	110
1.1	2570	1191	27300	0.95				
1.3	2240	1032	28000	1.10				
1.5	2070	930	28300	1.20				
1.6	1870	831	28700	1.35				
1.9	1620	719	29000	1.55				
2.2	1420	624	29300	1.75				
2.4	1280	558	29400	1.95				
3.1	1020	435	29700	2.4				
3.1	1230	438	12100	1.00	ME MEF MEA MEAF	77MK37	80M1-4	62
3.5	1090	389	13200	1.15				
4.2	920	327	14300	1.35				
4.7	830	289	14800	1.50				
5.4	720	250	15300	1.70				
5.5	660	246	5530	0.85	ME MEF MEA MEAF	67MK37	80M1-4	43
6.2	590	221	7990	0.95				
6.9	535	198	8520	1.05				
8.1	460	168	9180	1.25				

技术参数

Technical Data

P₁=0.55 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
2.4	1450	288.00	29200	1.70	ME	87	90L-8	96
2.6	1320	258.18	29400	1.85	MEF	87	90L-8	120
3.1	1150	222.40	29600	2.1	MEA	87	90L-8	94
					MEAF	87	90L-8	110
3.1	1130	288.00	29600	2.2	ME	87	80M2-6	90
3.5	1020	258.18	29700	2.4	MEF	87	80M2-6	110
4.0	900	222.40	29800	2.7	MEA	87	80M2-6	88
4.4	820	202.96	29800	2.9	MEAF	87	80M2-6	105
3.0	1090	225.26	13200	1.15	ME	77	90L-8	60
3.2	1040	214.00	13500	1.20	MEF	77	90L-8	70
3.6	930	189.09	14200	1.35	MEA	77	90L-8	60
4.2	810	161.60	14900	1.55	MEAF	77	90L-8	67
3.5	960	256.47	14100	1.35	ME	77	80M2-6	54
4.0	850	225.26	14700	1.50	MEF	77	80M2-6	64
4.2	810	214.00	14800	1.55	MEA	77	80M2-6	54
4.8	730	189.09	15200	1.75	MEAF	77	80M2-6	61
5.6	635	161.60	15600	2.0				
5.3	660	256.47	15500	1.90	ME	77	80M1-4	52
6.0	590	225.26	15800	2.2	MEF	77	80M1-4	62
6.4	560	214.00	15800	2.3	MEA	77	80M1-4	52
7.2	505	189.09	16000	2.5	MEAF	77	80M1-4	59
6.3	520	217.41	8660	1.00				
7.2	465	190.11	9150	1.10				
7.5	445	180.60	9300	1.15				
8.6	395	158.45	9620	1.30	ME	67	80M1-4	32
10	340	134.40	9930	1.55	MEF	67	80M1-4	39
11	310	121.33	10100	1.65	MEA	67	80M1-4	33
13	275	106.75	10200	1.85	MEAF	67	80M1-4	38
13	265	100.80	10300	1.95				
16	230	85.83	10400	2.3				
18	230	75.06	10400	2.1				
21	205	65.63	10500	2.4				
9.6	340	94.08	6710	0.85				
11	305	84.00	7030	0.95				
13	265	71.75	7360	1.10	ME	57	80M2-6	22
13	250	67.20	7470	1.15	MEF	57	80M2-6	26
16	245	54.59	7520	1.10	MEA	57	80M2-6	22
19	215	47.32	7710	1.25	MEAF	57	80M2-6	25
20	200	44.22	7790	1.35				
24	176	38.23	7920	1.55				

技术参数

Technical Data

P₁=0.55 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
8.6	370	158.12	6330	0.80				
9.9	330	137.05	6820	0.90				
11	310	128.10	7010	0.95				
12	270	110.73	7320	1.10				
14	235	94.08	7590	1.25				
16	210	84.00	7730	1.40				
19	184	71.75	7880	1.55	ME	57	80M1-4	21
20	174	67.20	7930	1.65	MEF	57	80M1-4	25
25	167	54.59	7960	1.45	MEA	57	80M1-4	21
29	146	47.32	8040	1.70	MEAF	57	80M1-4	24
31	137	44.22	8080	1.80				
36	120	38.23	8130	2.1				
42	103	32.48	7970	2.4				
47	92	29.00	7730	2.7				
55	79	24.77	7390	3.1				
59	75	23.20	7250	3.3				
67	69	20.33	6760	2.4				
16	205	84.00	5140	0.80				
19	179	71.75	5290	0.95				
20	169	67.20	5350	1.00				
25	165	54.59	5130	0.95				
29	144	47.32	5010	1.10				
31	135	44.22	4950	1.15				
36	118	38.23	4810	1.30				
42	101	32.48	4650	1.55	ME	47	80M1-4	17
47	91	29.00	4540	1.70	MEF	47	80M1-4	21
55	78	24.77	4380	2.0	MEA	47	80M1-4	18
59	74	23.20	4310	2.1	MEAF	47	80M1-4	20
67	69	20.33	3920	1.60				
77	60	17.62	3810	1.85				
83	56	16.47	3750	1.95				
96	49	14.24	3630	2.3				
112	42	12.10	3500	2.6				
126	37	10.80	3400	2.9				
147	32	9.23	3270	3.4				
44	94	30.68	2680	0.80				
47	89	28.76	2670	0.85				
54	79	25.38	2630	0.95				
60	70	22.50	2600	1.05	ME	37	80M1-4	14
71	60	19.13	2540	1.20	MEF	37	80M1-4	16
88	53	15.53	2230	0.95	MEA	37	80M1-4	14
102	46	13.39	2200	1.10	MEAF	37	80M1-4	15
109	43	12.48	2180	1.15				
125	37	10.91	2130	1.30				
133	35	10.23	2110	1.35				

技术参数

Technical Data

P₁=0.55 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
151	31	9.02	2070	1.50	ME	37	80M1-4	14
170	28	8.00	2020	1.60	MEF	37	80M1-4	16
200	24	6.80	1950	1.80	MEA	37	80M1-4	14
					MEAF	37	80M1-4	15
94	46	28.76	2420	1.40				
106	41	25.38	2360	1.50				
120	37	22.50	2310	1.55				
136	34	19.89	2100	1.30				
148	32	18.24	2070	1.40	ME	37	71M2-2	12
174	27	15.53	2010	1.55	MEF	37	71M2-2	14
202	24	13.39	1950	1.75	MEA	37	71M2-2	12
216	22	12.48	1920	1.85	MEAF	37	71M2-2	13
248	19	10.91	1870	2.0				
264	18	10.23	1840	2.1				
299	16	9.02	1780	2.3				
338	14	8.00	1730	2.5				
397	12	6.80	1660	2.4				

P₁=0.75kW

1.1	4910	1223	18400	0.85				
1.3	4300	1070	29800	1.00				
1.5	3710	928	33800	1.15	ME	97MK57	80M2-4	170
1.7	3270	824	34500	1.30	MEF	97MK57	80M2-4	205
1.9	2330	714	35800	1.80	MEA	97MK57	80M2-4	165
2.2	2480	626	35600	1.70	MEAF	97MK57	80M2-4	195
2.6	2130	538	36000	1.95				
2.9	1930	484	36200	2.2				
1.3	3060	1032	17400	0.80				
1.5	2820	930	25300	0.90				
1.7	2540	831	27400	1.00	ME	87MK57	80M2-4	110
1.9	2220	719	28100	1.15	MEF	87MK57	80M2-4	135
2.2	1940	624	28500	1.30	MEA	87MK57	80M2-4	110
2.5	1750	558	28800	1.45	MEAF	87MK57	80M2-4	125
3.2	1400	435	29300	1.75				
4.3	1070	323	29600	2.2				
4.2	1250	327	11900	1.00	ME	77MK37	80M2-4	63
4.8	1120	289	12900	1.10	MEF	77MK37	80M2-4	73
5.5	970	250	14000	1.25	MEA	77MK37	80M2-4	62
6.3	860	219	14600	1.45	MEAF	77MK37	80M2-4	69

技术参数

Technical Data

P₁=0.75 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
2.4	2040	286.40	36100	2.1	ME	97	100L1-8	160
2.6	1890	262.22	36300	2.2	MEF	97	100L1-8	195
3.0	1690	231.67	36400	2.5	MEA	97	100L1-8	155
					MEAF	97	100L1-8	185
3.1	1540	288.00	29100	1.60	ME	87	90S-6	95
3.5	1400	258.18	29300	1.75	MEF	87	90S-6	115
4.0	1220	222.40	29500	1.95	MEA	87	90S-6	93
4.4	1120	202.96	29600	2.1	MEAF	87	90S-6	110
4.8	1050	288.00	29600	2.2	ME	87	80M2-4	95
5.4	950	258.18	29700	2.4	MEF	87	80M2-4	115
6.2	830	222.40	29800	2.8	MEA	87	80M2-4	93
6.8	765	202.96	29900	3.0	MEAF	87	80M2-4	110
4.0	1160	225.26	12700	1.10	ME	77	90S-6	59
4.2	1110	214.00	13100	1.15	MEF	77	90S-6	69
4.8	990	189.09	13900	1.30	MEA	77	90S-6	59
5.6	860	161.60	14600	1.45	MEAF	77	90S-6	66
5.4	890	256.47	14500	1.45				
6.1	790	225.26	14900	1.60				
6.5	755	214.00	15100	1.70				
7.3	675	189.09	15400	1.90	ME	77	80M2-4	54
8.5	585	161.60	15800	2.2	MEF	77	80M2-4	64
9.3	545	148.15	15900	2.3	MEA	77	80M2-4	54
11	480	130.00	16000	2.5	MEAF	77	80M2-4	61
11	460	123.20	16000	2.6				
13	405	107.83	16000	2.9				
7.3	625	190.11	7570	0.85				
7.6	595	180.60	7900	0.85				
8.7	530	158.45	8570	1.00				
10	460	134.40	9180	1.15				
11	420	121.33	9470	1.25				
13	375	106.75	9750	1.40	ME	67	80M2-4	33
14	355	100.80	9860	1.45	MEF	67	80M2-4	40
16	305	85.83	10100	1.70	MEA	67	80M2-4	34
18	310	75.06	10100	1.55	MEAF	67	80M2-4	39
21	275	65.63	10200	1.75				
22	260	62.35	10300	1.85				
25	230	54.70	10300	2.1				
30	198	46.40	9840	2.4				
13	365	71.75	6430	0.80	ME	57	90S-6	27
13	345	67.20	6660	0.85	MEF	57	90S-6	31
16	295	56.61	7140	1.00	MEA	57	90S-6	27
19	295	47.32	7150	0.90	MEAF	57	90S-6	30
20	275	44.22	7300	1.00				

技术参数

Technical Data

P₁=0.75 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
12	365	110.73	6400	0.80	ME MEF MEA MEAF	57	80M2-4	22
15	315	94.08	6930	0.95				
16	285	84.00	7210	1.05				
19	250	71.75	7500	1.15				
21	235	67.20	7590	1.20				
25	225	54.59	7650	1.10				
29	197	47.32	7810	1.25				
31	185	44.22	7870	1.35				
36	161	38.23	7980	1.50				
42	138	32.48	7670	1.80				
48	124	29.00	7450	2.0				
56	107	24.77	7150	2.3				
59	100	23.20	7030	2.5				
68	93	20.33	6490	1.80				
78	81	17.62	6260	2.1				
84	76	16.47	6160	2.2				
97	66	14.24	5930	2.6				
29	194	47.32	4530	0.80	ME MEF MEA MEAF	47	80M2-4	18
31	182	44.22	4500	0.85				
36	159	38.23	4420	1.00				
42	136	32.48	4310	1.15				
48	122	29.00	4230	1.25				
56	106	24.77	4110	1.45	ME MEF MEA MEAF	47	80M2-4	18
59	99	23.20	4060	1.55				
68	93	20.33	3610	1.20				
78	81	17.62	3530	1.35				
84	76	16.47	3490	1.45				
97	66	14.24	3410	1.65				
114	56	12.10	3300	1.95				
128	50	10.80	3230	2.2				
150	43	9.23	3120	2.5				
160	41	8.64	3070	2.7				
190	34	7.28	2950	3.0				
72	81	19.13	2270	0.85	ME MEF MEA MEAF	37	80M2-4	15
111	57	12.48	1930	0.85				
127	50	10.91	1920	0.95				
135	47	10.23	1910	1.00				
153	42	9.02	1890	1.10				
173	37	8.00	1860	1.20				
203	32	6.80	1820	1.35				

技术参数

Technical Data

P₁=0.75 kW

Na rpm	M2 Nm	i	Fr2MAX[N]	fs	Type	Gear unit	Motor size	 Kg
141	43	19.13	2090	1.05	ME MEF MEA MEAF	37	80M1-2	14 16 14 15
174	37	15.53	1860	1.15				
202	32	13.39	1820	1.30				
216	30	12.48	1800	1.35				
248	26	10.91	1760	1.50				
264	25	10.23	1740	1.55				
299	22	9.02	1690	1.65				
338	19	8.00	1650	1.80				
397	17	6.80	1590	1.75				

P₁=1.1kW

1.7	4780	824	22300	0.90	ME MEF MEA MEAF	97MK57	90S-4	175 210 170 200
2.0	3410	714	34300	1.25				
2.2	3630	626	33900	1.15				
2.6	3120	538	34800	1.35				
2.9	2820	484	35200	1.50				
3.3	2450	420	35700	1.70				
					ME MEF MEA MEAF	87MK57	90S-4	115 140 115 130
2.2	2840	624	24800	0.90				
2.5	2570	558	27300	0.95				
2.9	2260	485	28000	1.10				
3.2	2060	435	28300	1.20				
3.7	1810	378	28700	1.35				
4.3	1570	323	29100	1.55				
5.0	1380	281	29300	1.75				
5.5	1480	255	29200	1.35				
6.3	1300	222	29400	1.55				
6.8	1210	205	29500	1.65				
					ME MEF MEA MEAF	77MK37	90S-4	68 78 68 74
6.4	1250	219	11800	1.00				
2.3	3080	286.40	34800	1.35	ME MEF MEA MEAF	97	100L2-8	165 200 165 185
2.6	2840	262.22	35200	1.50				
2.9	2540	231.67	35600	1.65				
3.4	2190	196.52	36000	1.90				
					ME MEF MEA MEAF	97	100L-6	155 185 150 175
3.2	2310	286.40	35900	1.80				
3.5	2130	262.22	36000	1.95				
4.0	1900	231.67	36300	2.2				

技术参数

Technical Data

P₁=1.1 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
3.2	2220	288.00	28100	1.10	ME	87	100L-6	96
3.6	2010	258.18	28400	1.20	MEF	87	100L-6	120
4.1	1760	222.40	28800	1.35	MEA	87	100L-6	94
4.5	1620	202.96	29000	1.45	MEAF	87	100L-6	110
4.9	1520	288.00	29100	1.50	ME MEF MEA MEAF	87	90S-4	95 115 93 110
5.4	1370	258.18	29300	1.65				
6.3	1200	222.40	29500	1.90				
6.9	1100	202.96	29600	2.1				
7.8	990	180.00	29700	2.2				
9.2	840	151.30	29800	2.6				
6.2	1150	225.26	12800	1.10	ME MEF MEA MEAF	77	90S-4	59 69 59 66
6.5	1100	214.00	13200	1.15				
7.4	980	189.09	13900	1.30				
8.7	850	161.60	14700	1.50				
9.5	785	148.15	15000	1.60				
11	695	130.00	15400	1.75				
11	665	123.20	15500	1.80				
13	585	107.83	15800	2.0				
14	535	97.14	15900	2.1				
16	470	85.22	16000	2.3				
12	605	121.33	7790	0.85	ME MEF MEA MEAF	67	90S-4	39 45 40 44
13	540	106.75	8490	0.95				
14	515	100.80	8740	1.00				
16	445	85.83	9300	1.15				
18	405	78.00	9550	1.30				
21	400	65.63	9610	1.20				
22	380	62.35	9720	1.25				
26	335	54.70	9560	1.45				
30	285	46.40	9240	1.65				
33	260	41.89	9040	1.85				
38	230	36.85	8780	2.1				
40	220	34.80	8660	2.2				
47	187	29.63	8330	2.6				
20	360	71.75	6480	0.80				
21	340	67.20	6710	0.85				
25	290	56.61	7180	0.90				
30	285	47.32	7220	0.85				

技术参数

Technical Data

P₁=1.1 kW

NA rpm	M2 Nm	i	Fr2MAX[N]	fs	Type	Gear unit	Motor size	 Kg
32	265	44.22	7360	0.90	ME MEF MEA MEAF	57	90S-4	27 31 27 30
37	235	38.23	7410	1.05				
43	200	32.48	7170	1.25				
48	179	29.00	7000	1.35				
57	154	24.77	6760	1.60				
60	145	23.20	6660	1.70				
72	123	19.54	6390	1.75				
79	117	17.62	5870	1.45				
85	110	16.47	5780	1.55				
98	95	14.24	5610	1.75				
116	82	12.10	5400	2.1				
130	73	10.80	5260	2.3				
152	63	9.23	5050	2.7				
48	177	29.00	3720	0.90				
57	153	24.77	3670	1.00				
60	143	23.20	3640	1.05				
72	122	19.54	3560	1.20				
79	117	17.62	3070	0.95				
85	109	16.47	3060	1.00				
98	95	14.24	3030	1.15	ME MEF MEA MEAF	47	90S-4	24 27 25 26
116	81	12.10	2980	1.35				
130	73	10.80	2940	1.50				
152	63	9.23	2870	1.75				
162	59	8.64	2840	1.85				
192	50	7.28	2750	2.1				
175	54	8.00	1570	0.85	ME MEF MEA MEAF	37	90S-4	20 22 20 22
206	46	6.80	1580	0.95				
202	47	13.39	1590	0.85	ME MEF MEA MEAF	37	80M2-2	15 17 15 16
216	44	12.48	1580	0.90				
248	39	10.91	1570	1.00				
264	36	10.23	1560	1.05				
299	32	9.02	1540	1.10				
338	28	8.00	1510	1.25				
397	24	6.80	1470	1.20				

技术参数

Technical Data

P₁=1.5 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
2.0	4640	714	28400	0.90	ME MEF MEA MEAF	97MK57	90L-4	180 210 175 200
2.2	4950	626	16200	0.85				
2.6	4260	538	30500	1.00				
2.9	3850	484	33500	1.10				
3.4	3350	420	34400	1.25				
3.8	3030	376	34900	1.40				
4.3	2660	327	35400	1.60				
2.9	3090	485	15900	0.80	ME MEF MEA MEAF	87MK57	90L-4	120 140 115 135
3.2	2810	435	25500	0.85				
3.7	2470	378	27600	1.00				
4.4	2150	323	28200	1.10				
5.0	1890	281	28600	1.25				
5.5	2020	255	28400	1.00				
6.4	1770	222	28800	1.10				
6.9	1650	205	28900	1.20				
2.4	4030	286.40	33100	1.05	ME MEF MEA MEAF	97	112M-8	175 205 170 195
2.7	3720	262.22	33700	1.15				
3.0	3330	231.67	34400	1.25				
3.6	2870	196.52	35200	1.45				
3.2	3150	286.40	34700	1.35	ME MEF MEA MEAF	97	100L-6	160 190 155 185
3.5	2910	262.22	35100	1.45				
4.0	2600	231.67	35500	1.60				
4.7	2230	196.52	35900	1.90				
4.9	2130	286.40	36000	1.90	ME MEF MEA MEAF	97	90L-4	155 185 150 175
5.4	1970	262.22	36200	2.0				
6.1	1760	231.67	36400	2.3				
7.2	1510	196.52	36600	2.7				
3.6	2740	258.18	26600	0.90	ME MEF MEA MEAF	87	100L-6	105 125 100 120
4.1	2390	222.40	27700	1.00				
4.5	2200	202.96	28100	1.10				
5.1	1980	180.00	28500	1.20				
4.9	2060	288.00	28300	1.10	ME MEF MEA MEAF	87	90L-4	96 96 96 96 96 96 96 96 96 96
5.5	1860	258.18	28700	1.20				
6.3	1630	222.40	29000	1.40				
7.0	1500	202.96	29200	1.50				
7.8	1340	180.00	29400	1.65				
9.3	1140	151.30	29600	1.90				
10	1060	139.05	29600	2.0				
11	950	123.48	29700	2.2				
13	850	110.40	29800	2.4				
14	770	99.26	29900	2.5				

技术参数

Technical Data

P₁=1.5 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
7.5	1330	189.09	10600	0.95	ME MEF MEA MEAF	77	90L-4	60
8.7	1150	161.60	12700	1.10				
9.5	1060	148.15	13400	1.15				
11	940	130.00	14100	1.30				
11	900	123.20	14400	1.35				
13	795	107.83	14900	1.45				
15	725	97.14	15300	1.60				
17	640	85.22	15400	1.70				
19	650	75.09	14100	1.70				
20	620	71.33	14000	1.80				
21	510	66.67	14600	2.0				
22	550	63.03	13700	2.0				
25	440	56.92	14000	2.3				
26	470	53.87	13200	2.3				
29	435	49.38	13000	2.5				
33	385	43.33	12600	2.9				
16	600	85.83	7850	0.85	ME	67	90L-4	41
18	550	78.00	8390	0.95	MEF	67	90L-4	47
21	540	65.63	8510	0.90	MEA	67	90L-4	42
					MEAF	67	90L-4	46
23	515	62.35	8740	0.95	ME MEF MEA MEAF	67	90L-4	41
26	455	54.70	8810	1.05				
30	390	46.40	8590	1.25				
34	355	41.89	8450	1.35				
38	310	36.85	8250	1.55				
41	295	34.80	8160	1.60				
48	255	29.63	7900	1.90				
52	230	26.93	7740	2.1				
58	220	24.44	7000	1.55				
61	210	23.22	6950	1.60				
69	186	20.37	6790	1.85				
82	159	17.28	6580	2.1				
90	144	15.60	6440	2.4				
103	127	13.73	6260	2.7				
43	270	32.48	6630	0.90	ME MEF MEA MEAF	57	90L-4	29
49	245	29.00	6520	1.00				
57	210	24.77	6340	1.15				
61	196	23.20	6270	1.25				
72	167	19.54	6060	1.30				
80	159	17.62	5430	1.05				
86	149	16.47	5380	1.15				
99	129	14.24	5250	1.30				
117	110	12.10	5100	1.55				
131	99	10.80	4980	1.70				
153	85	9.23	4820	2.0				

技术参数

Technical Data

P₁=1.5 kW								
NA rpm	M₂ Nm	i	Fr₂MAX[N]	f_s	Type	Gear unit	Motor size	 Kg
99	129	14.24	2610	0.85	ME	47	90L-4	25
117	110	12.10	2620	1.00	MEF	47	90L-4	28
131	99	10.80	2620	1.10	MEA	47	90L-4	26
					MEAF	47	90L-4	28
153	85	9.23	2590	1.30	ME	47	90L-4	25
163	79	8.64	2580	1.35	MEF	47	90L-4	28
194	67	7.28	2530	1.55	MEA	47	90L-4	26
					MEAF	47	90L-4	28
310	42	9.02	1350	0.85	ME	37	90S-2	20
350	37	8.00	1350	0.95	MEF	37	90S-2	22
412	32	6.80	1330	0.90	MEA	37	90S-2	20
					MEAF	37	90S-2	22
P₁=2.2 kW								
3.4	4950	420	16300	0.85	ME	97MK57	100M-4	185
3.8	4460	376	27600	0.95	MEF	97MK57	100M-4	220
4.3	3910	327	33400	1.05	MEA	97MK57	100M-4	180
4.9	3460	287	34200	1.20	MEAF	97MK57	100M-4	205
5.6	3030	252	34900	1.40				
3.3	4530	286.40	30200	0.95	ME	97	112M-6	175
3.6	4180	262.22	32800	1.00	MEF	97	112M-6	205
4.1	3730	231.67	33700	1.15	MEA	97	112M-6	170
4.8	3210	196.52	34600	1.30	MEAF	97	112M-6	195
4.9	3130	286.40	34800	1.30				
5.4	2890	262.22	35100	1.40				
6.1	2570	231.67	35500	1.55				
7.2	2210	196.52	36000	1.80				
7.8	2050	180.95	36100	1.90	ME	97	100M-4	160
8.7	1840	161.74	36300	2.1	MEF	97	100M-4	195
9.7	1670	145.60	36500	2.2	MEA	97	100M-4	155
11	1520	131.85	36600	2.4	MEAF	97	100M-4	185
12	1360	116.92	36700	2.6				
13	1240	105.71	36800	2.8				
16	1060	89.60	36900	3.1				
5.5	2730	258.18	26800	0.85				
6.3	2380	222.40	27700	0.95	ME	87	100M-4	105
7.0	2190	202.96	28100	1.05	MEF	87	100M-4	125
7.8	1970	180.00	28500	1.10	MEA	87	100M-4	100
9.3	1680	151.30	28900	1.30	MEAF	87	100M-4	120
10	1550	139.05	29100	1.35				
11	1390	123.48	29300	1.50				

技术参数

Technical Data

P₁=2.2 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
13	1250	110.40	29500	1.60	ME MEF MEA MEAF	87	100M-4	105 125 100 120
14	1130	99.26	29600	1.75				
16	990	86.15	29700	1.90				
17	1060	81.76	29600	1.50				
18	890	77.14	29800	2.0				
20	920	70.43	29700	1.75				
22	840	64.27	29800	1.90				
25	750	57.00	29900	2.1				
11	1390	130.00	6140	0.85	ME MEF MEA MEAF	77	100M-4	67 77 67 74
11	1320	123.20	11100	0.90				
13	1170	107.83	12600	1.00				
15	1060	97.14	13400	1.10				
17	940	85.22	14100	1.15				
19	840	75.20	13800	1.30				
21	745	66.67	13500	1.40				
22	810	63.03	12400	1.35				
25	645	56.92	13100	1.55				
26	695	53.87	12100	1.60				
29	635	49.38	11900	1.75				
33	560	43.33	11700	1.95				
34	535	41.07	11600	2.1				
39	470	35.94	11300	2.3				
44	425	32.38	11000	2.6				
50	375	28.41	10700	2.8				
56	330	25.07	10400	3.1				
62	310	22.89	9490	2.3				
67	285	20.99	9340	2.5				
30	570	46.40	7480	0.85	ME MEF MEA MEAF	67	100M-4	48 54 49 53
34	515	41.89	7440	0.95				
38	460	36.85	7360	1.05				
41	435	34.80	7320	1.10				
48	370	29.63	7180	1.30				
52	340	26.93	7080	1.40				
60	295	23.33	6920	1.60				
69	275	20.37	6060	1.25				
82	235	17.28	5960	1.45				
90	210	15.60	5880	1.60				
103	186	13.73	5770	1.85				
109	176	12.96	5710	1.95				
128	151	11.03	5550	2.3				
141	137	10.03	5450	2.5				
162	119	8.69	5300	2.8				

技术参数

Technical Data

P₁=2.2 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
99	190	14.24	4640	0.90				
117	162	12.10	4580	1.05	ME	57	100M-4	35
131	145	10.80	4520	1.15	MEF	57	100M-4	39
153	124	9.23	4420	1.35	MEA	57	100M-4	35
163	117	8.64	4380	1.40	MEAF	57	100M-4	38
194	99	7.28	4250	1.50				

P₁=3.0 kW

4.9	4760	287	22900	0.90	ME	97MK57	100L2-4	190
5.6	4180	252	31900	1.00	MEF	97MK57	100L2-4	225
6.4	3650	219	33900	1.15	MEA	97MK57	100L2-4	185
6.8	3440	205	34300	1.20	MEAF	97MK57	100L2-4	210
4.9	4290	286.40	32600	0.95				
5.3	3960	262.22	33300	1.00				
6.0	3530	231.67	34100	1.15				
7.1	3040	196.52	34900	1.30				
7.7	2810	180.95	35200	1.40	ME	97	100L2-4	165
8.7	2530	161.74	35600	1.50	MEF	97	100L2-4	200
9.6	2300	145.60	35900	1.65	MEA	97	100L2-4	160
11	2090	131.85	36100	1.75	MEAF	97	100L2-4	185
12	1870	116.92	36300	1.90				
13	1700	105.71	36400	2.0				
16	1450	89.60	36600	2.2				
17	1470	80.85	36600	2.2				
7.8	2700	180.00	27100	0.80				
9.2	2300	151.30	27900	0.95				
10	2130	139.05	28200	1.00				
11	1900	123.48	28600	1.10				
13	1720	110.40	28900	1.15				
14	1550	99.26	29100	1.25				
16	1360	86.15	29300	1.40				
17	1460	81.76	29200	1.10	ME	87	100L2-4	110
18	1230	77.14	29500	1.50	MEF	87	100L2-4	130
20	1260	70.43	29400	1.25	MEA	87	100L2-4	105
22	1160	64.27	29500	1.40	MEAF	87	100L2-4	120
25	1030	57.00	29700	1.55				
29	870	47.91	29800	1.85				
32	800	44.03	29800	2.0				
36	715	39.10	29900	2.2				
40	640	34.96	29900	2.5				
16	1290	85.22	11500	0.85	ME	77	100L2-4	71
19	1150	75.20	12500	0.95	MEF	77	100L2-4	81
21	1020	66.67	12400	1.00	MEA	77	100L2-4	71
22	1110	63.03	10900	1.00	MEAF	77	100L2-4	78

技术参数

Technical Data

P₁=3.0 kW								
NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
25	880	56.92	12100	1.10	ME MEF MEA MEAF	77	100L2-4	71
26	950	53.87	10800	1.15				
28	880	49.38	10800	1.25				
32	770	43.33	10700	1.40				
34	735	41.07	10600	1.50				
39	645	35.94	10400	1.70				
43	585	32.38	10300	1.85				
49	515	28.41	10100	2.0				
56	455	25.07	9840	2.2				
61	430	22.89	8680	1.65				
67	395	20.99	8590	1.80				
76	345	18.42	8450	2.0				
80	330	17.45	8390	2.2				
92	290	15.28	8210	2.5				
102	260	13.76	8060	2.7				
116	230	12.07	7870	3.1				
131	205	10.65	7670	3.6				
40	595	34.80	6350	0.80	ME	67	100L2-4	52
47	510	29.63	6350	0.95	MEF	67	100L2-4	58
52	465	26.93	6330	1.05	MEA	67	100L2-4	53
					MEAF	67	100L2-4	57
60	405	23.33	6270	1.20	ME MEF MEA MEAF	67	100L2-4	52
69	375	20.37	5230	0.90				
81	320	17.28	5250	1.05				
90	290	15.60	5240	1.15				
102	255	13.73	5210	1.35				
108	240	12.96	5190	1.40				
127	205	11.03	5100	1.65				
140	188	10.03	5050	1.80				
161	164	8.69	4940	2.1				
185	143	7.56	4830	2.1				
130	199	10.80	3990	0.85	ME	57	100L2-4	39
152	171	9.23	3970	1.00	MEF	57	100L2-4	43
162	160	8.64	3960	1.05	MEA	57	100L2-4	39
192	136	7.28	3900	1.10	MEAF	57	100L2-4	42
P₁=4.0 kW								
6.5	4820	219	21900	0.85	ME	97MK57	112M-4	195
6.9	4530	205	26700	0.95	MEF	97MK57	112M-4	230
					MEA	97MK57	112M-4	190
					MEAF	97MK57	112M-4	220

技术参数

Technical Data

P₁=4.0 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
6.1	4650	231.67	28300	0.85	ME MEF MEA MEAF	97	112M-4	175 205 170 195
7.2	3990	196.52	33200	1.00				
7.9	3700	180.95	33800	1.05				
8.8	3330	161.74	34400	1.15				
9.8	3020	145.60	34900	1.25				
11	2750	131.85	35300	1.35				
12	2460	116.92	35700	1.45				
13	2230	105.71	35900	1.55				
16	1910	89.60	36300	1.70				
18	1940	80.85	36200	1.65				
20	1720	71.43	36400	1.90				
23	1470	60.59	36600	2.3				
25	1350	55.79	36700	2.4				
12	2510	123.48	27500	0.80	ME MEF MEA MEAF	87	112M-4	115 135 110 125
13	2260	110.40	28000	0.90				
14	2040	99.26	28400	0.95				
16	1790	86.15	28800	1.05				
18	1610	77.14	29000	1.15				
20	1660	70.43	28900	0.95				
22	1520	64.27	29100	1.05				
25	1350	57.00	29300	1.20				
30	1150	47.91	29500	1.40				
32	1060	44.03	29600	1.50				
36	940	39.10	29700	1.70				
41	840	34.96	29800	1.90				
45	760	31.43	29100	2.1				
52	665	27.28	28200	2.4				
56	635	25.50	26600	1.95				
25	1160	56.92	10800	0.85	ME MEF MEA MEAF	77	112M-4	77 87 77 84
26	1250	53.87	9250	0.90				
29	1150	49.38	9320	0.95				
33	1020	43.33	9370	1.10				
35	960	41.07	9370	1.15	ME MEF MEA MEAF	77	112M-4	77 87 77 84
40	850	35.94	9340	1.30				
44	765	32.38	9290	1.40				
50	675	28.41	9190	1.55				
57	600	25.07	9070	1.70				
62	565	22.89	7650	1.25				
68	520	20.99	7650	1.35				
77	455	18.42	7620	1.55				
81	435	17.45	7590	1.65				
93	380	15.28	7510	1.85				
103	345	13.76	7430	2.1				
118	300	12.07	7310	2.4				
133	265	10.65	7170	2.7				

技术参数

Technical Data

P₁=4.0 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
150	235	9.44	7030	3.1	ME	77	112M-4	77
176	205	8.06	6830	3.4	MEF	77	112M-4	87
					MEA	77	112M-4	77
					MEAF	77	112M-4	84
82	420	17.28	3810	0.80				
91	380	15.60	4180	0.90				
103	335	13.73	4500	1.00	ME	67	112M-4	59
110	320	12.96	4520	1.05	MEF	67	112M-4	65
129	270	11.03	4530	1.25	MEA	67	112M-4	60
142	245	10.03	4520	1.35	MEAF	67	112M-4	64
163	215	8.69	4490	1.55				
188	188	7.56	4430	1.55				

P₁=5.5 kW

8.8	4550	161.74	29900	0.85				
9.8	4130	145.60	32900	0.90				
11	3760	131.85	33700	0.95				
12	3360	116.92	34400	1.05				
14	3050	105.71	34900	1.15				
16	2610	89.60	35500	1.25	ME	97	132S-4	180
18	2290	78.26	35900	1.35	MEF	97	132S-4	210
20	2350	71.43	35800	1.40	MEA	97	132S-4	175
22	1930	65.45	36200	1.50	MEAF	97	132S-4	200
24	2000	60.59	36200	1.65				
26	1850	55.79	36300	1.80				
29	1660	49.87	36500	2.0				
32	1500	44.89	36600	2.2				
35	1360	40.65	36700	2.4				
19	2200	77.14	28100	0.85				
22	1850	64.00	28700	0.90				
25	1850	57.00	28700	0.85				
30	1560	47.91	29100	1.00				
32	1440	44.03	29200	1.10				
37	1280	39.10	29200	1.25				
41	1150	34.96	28600	1.40				
45	1040	31.43	28000	1.55	ME	87	132S-4	120
52	910	27.28	27200	1.75	MEF	87	132S-4	140
56	870	25.50	25200	1.45	MEA	87	132S-4	115
67	730	21.43	24500	1.70	MEAF	87	132S-4	135
73	675	19.70	24100	1.85				
82	600	17.49	23500	2.1				
91	535	15.64	23000	2.3				
102	485	14.06	22500	2.6				
117	420	12.21	21800	3.0				
131	375	10.93	21200	3.3				

技术参数

Technical Data

P₁=5.5 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
35	1320	41.07	7560	0.85	ME	77	132S-4	84
40	1160	35.94	7750	0.95	MEF	77	132S-4	94
44	1050	32.38	7850	1.05	MEA	77	132S-4	84
					MEAF	77	132S-4	91
50	920	28.41	7920	1.15				
57	820	25.07	7940	1.25				
64	725	22.22	7920	1.35				
78	625	18.42	5920	1.15				
82	590	17.45	6170	1.20	ME	77	132S-4	84
94	520	15.28	6490	1.35	MEF	77	132S-4	94
104	470	13.76	6510	1.50	MEA	77	132S-4	84
118	410	12.07	6500	1.75	MEAF	77	132S-4	91
134	365	10.65	6450	2.0				
151	325	9.44	6390	2.2				
177	275	8.06	6280	2.5				
130	370	11.03	2930	0.90	ME	67	132S-4	64
143	340	10.03	3260	1.00	MEF	67	132S-4	70
165	295	8.69	3670	1.15	MEA	67	132S-4	65
189	255	7.56	3850	1.15	MEAF	67	132S-4	69

P₁=7.5 kW

14	4160	105.71	32900	0.85				
16	3560	89.60	34100	0.90				
18	3130	78.26	34800	1.00				
20	3200	71.43	34600	1.05				
22	2630	65.45	35500	1.10				
24	2730	60.59	35300	1.20				
26	2520	55.79	35600	1.30	ME	97	132M-4	200
29	2260	49.87	35900	1.45	MEF	97	132M-4	230
32	2040	44.89	36100	1.60	MEA	97	132M-4	195
35	1850	40.65	36300	1.80	MEAF	97	132M-4	220
40	1650	36.05	36200	2.0				
44	1490	32.60	35500	2.2				
54	1240	26.39	32000	2.1				
61	1110	23.59	31400	2.3				
67	1000	21.23	30700	2.6				
74	910	19.23	30100	2.9				
32	1970	44.03	27800	0.80	ME	87	132M-4	140
37	1750	39.10	27400	0.90	MEF	87	132M-4	165
41	1570	34.96	27000	1.00	MEA	87	132M-4	140
					MEAF	87	132M-4	155

技术参数

Technical Data

P₁=7.5kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
45	1420	31.43	26500	1.15	ME MEF MEA MEAF	87	132M-4	140
52	1230	27.28	25900	1.30				
56	1180	25.50	23500	1.05				
67	1000	21.43	23000	1.25				
73	920	19.70	22700	1.35				
82	820	17.49	22300	1.50				
91	730	15.64	21900	1.70				
102	660	14.06	21500	1.90				
117	575	12.21	20900	2.2				
131	515	10.93	20500	2.4				
158	430	9.07	19700	2.7				
181	375	7.88	19100	2.7				
50	1260	28.41	6240	0.85	ME	77	132M-4	105
57	1110	25.07	6450	0.90	MEF	77	132M-4	115
64	990	22.22	6600	1.00	MEA	77	132M-4	105
78	850	18.42	1860	0.85	MEAF	77	132M-4	110
82	810	17.45	2290	0.90	ME MEF MEA MEAF	77	132M-4	105
94	705	15.28	3250	1.00				
104	640	13.76	3890	1.10				
118	560	12.07	4570	1.30				
134	495	10.65	5110	1.45				
151	440	9.44	5540	1.65				
177	380	8.06	5560	1.80				

P₁=11.0kW

26	3670	55.79	33800	0.90	ME MEF MEA MEAF	97	160M-4	215
29	3290	49.87	34500	1.00				
32	2970	44.89	34800	1.10				
35	2700	40.65	34400	1.20				
40	2400	36.05	33800	1.40				
44	2170	32.60	33300	1.45				
55	1810	26.39	29400	1.45				
61	1620	23.59	29000	1.60				
68	1460	21.23	28600	1.80				
75	1320	19.23	28200	1.95				
84	1180	17.05	27600	2.2				
93	1070	15.42	27200	2.3				
110	900	13.07	26400	2.6				
126	790	11.41	25700	2.8				
53	1800	27.28	23700	0.90	ME	87	160M-4	155
59	1610	24.43	23400	1.00	MEF	87	160M-4	175
71	1340	20.27	22800	1.20	MEA	87	160M-4	150
					MEAF	87	160M-4	170

技术参数

Technical Data

P₁=11.0 kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
73	1340	19.70	20400	0.95	ME MEF MEA MEAF	87	160M-4	155 175 150 170
82	1190	17.49	20200	1.05				
92	1070	15.64	20000	1.15				
102	960	14.06	19800	1.30				
118	840	12.21	19400	1.50				
132	750	10.93	19100	1.65				
159	625	9.07	18600	1.85				
183	545	7.88	18100	1.85				

P₁=15.0 kW

33	4000	44.89	31400	0.85	ME	97	160L-4	255
36	3630	40.65	31300	0.90	MEF	97	160L-4	285
41	3230	36.05	31000	1.00	SEA	97	160L-4	250
					MEAF	97	160L-4	275
45	2920	32.60	30800	1.10	ME MEF MEA MEAF	97	160L-4	255 285 250 275
55	2430	26.39	26400	1.05				
62	2180	23.59	26300	1.20				
69	1970	21.23	26200	1.30				
76	1780	19.23	26000	1.45				
86	1580	17.05	25700	1.60				
95	1430	15.42	25400	1.70				
112	1220	13.07	24800	1.90				
128	1060	11.41	24300	2.1	ME MEF MEA MEAF	87	160L-4	195 215 190 205
153	890	9.55	23600	2.3				
177	775	8.26	22900	2.3				
93	1430	15.64	17900	0.85				
104	1290	14.06	17900	0.95				
120	1120	12.21	17800	1.10				
134	1010	10.93	17600	1.25				
161	840	9.07	17300	1.35				
185	730	7.88	17000	1.40	MEAF	87	160L-4	205

P₁=18.5 kW

41	3970	36.05	28700	0.85	ME MEF MEA MEAF	97	180M-4	275 310 270 295
45	3590	32.60	28600	0.90				
53	3060	27.63	28400	1.00				
61	2680	24.13	28100	1.05				
69	2420	21.23	24100	1.10				
76	2190	19.23	24100	1.20				

技术参数

Technical Data

P₁=18.5kW

NA rpm	M ₂ Nm	i	Fr ₂ MAX[N]	f _s	Type	Gear unit	Motor size	 Kg
86	1950	17.05	24000	1.30				
95	1760	15.42	23900	1.40	ME	97	180M-4	275
112	1500	13.07	23500	1.55	MEF	97	180M-4	310
128	1310	11.41	23200	1.70	MEA	97	180M-4	270
153	1100	9.55	22600	1.85	MEAF	97	180M-4	295
177	950	8.26	22100	1.85				





P₁=22kW

53	3630	27.63	26600	0.85	ME	97	180L-4	290
61	3180	24.13	26500	0.90	MEF	97	180L-4	320
69	2870	21.23	19800	0.90	MEA	97	180L-4	285
76	2600	19.23	21800	1.00	MEAF	97	180L-4	310
86	2310	17.05	22300	1.10				
95	2090	15.42	22400	1.20	ME	97	180L-4	290
112	1780	13.07	22300	1.30	MEF	97	180L-4	320
128	1560	11.41	22100	1.40	MEA	97	180L-4	285
153	1300	9.55	21700	1.55	MEAF	97	180L-4	310
177	1130	8.26	21300	1.55				

安装尺寸

Mounting Dimensions

ME37...

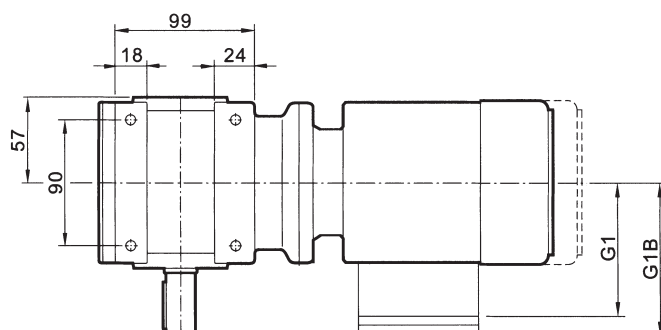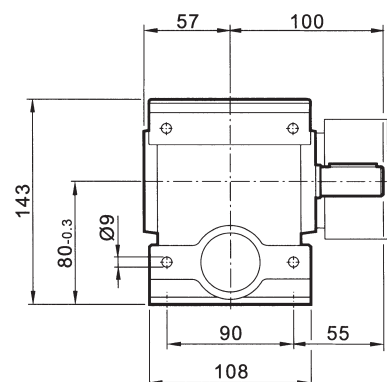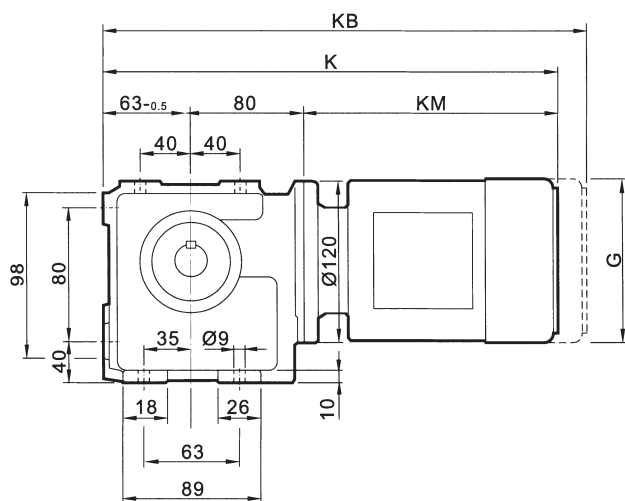

尺寸 Dimensions	电机规格				Motor frame						
	63	71	80	90							
G	132	145	145	197							
G1	99	122	122	154							
G1B	99	127	127	161							
K	334	349	399	419							
KB	389	413	463	504							
KM	191	206	256	276							

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEF37...

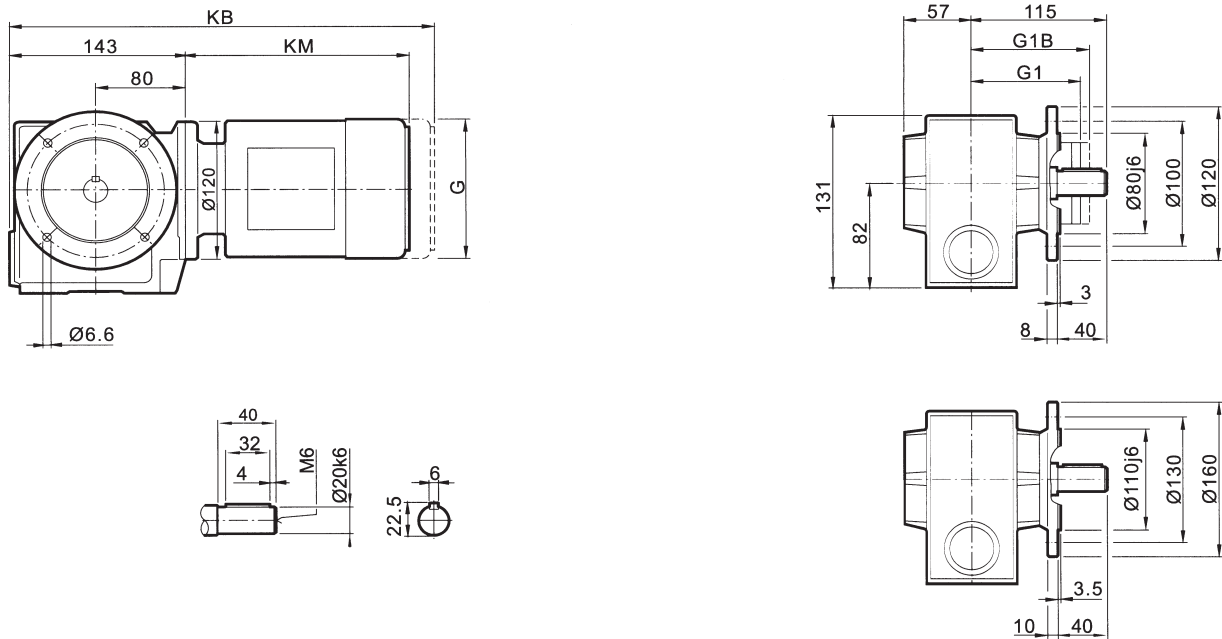

MEAF37...

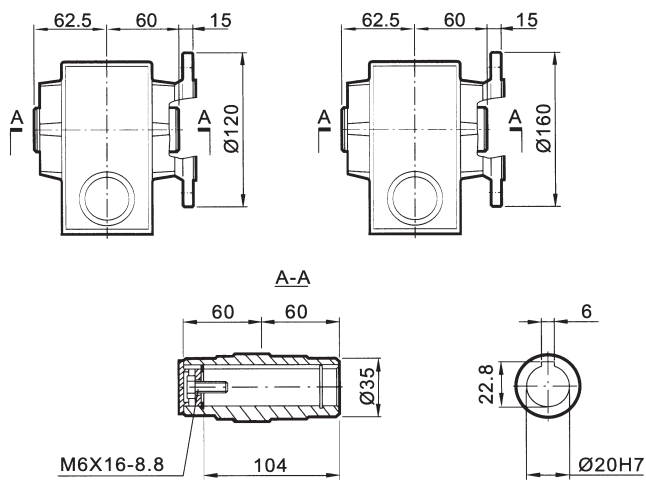

MEHF37...

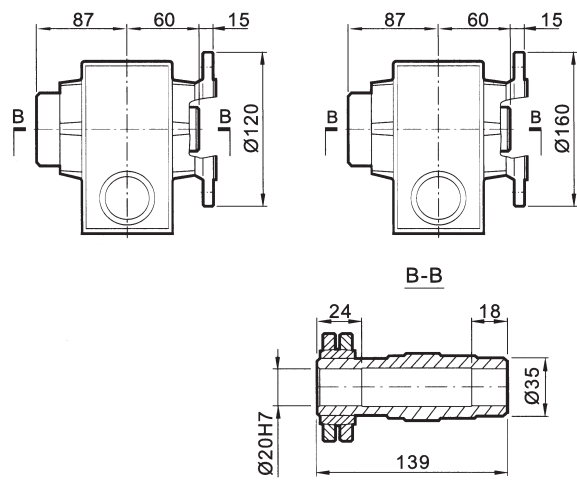

尺寸 Dimensions	电机规格				Motor frame						
	63	71	80	90							
G	132	145	145	197							
G1	99	122	122	154							
G1B	99	127	127	161							
K	334	349	399	419							
KB	389	413	463	504							
KM	191	206	256	276							

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。




ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.



安装尺寸

Mounting Dimensions

MEA37...

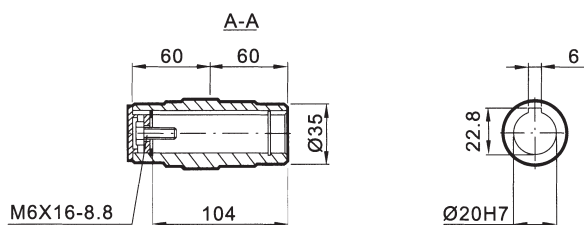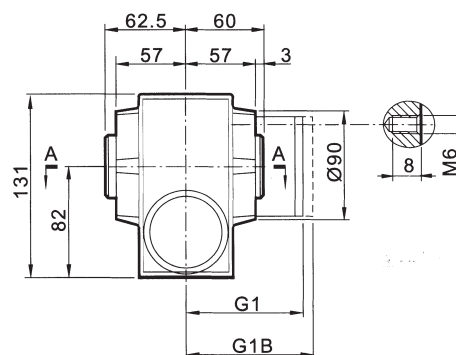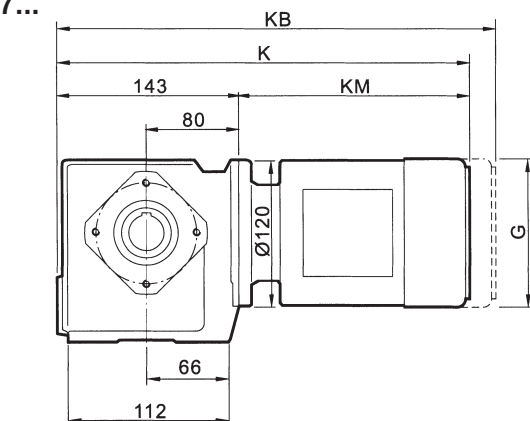

MEH37...

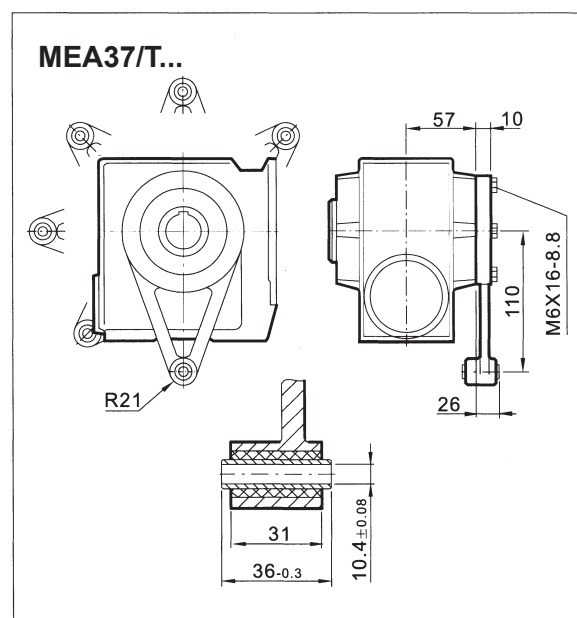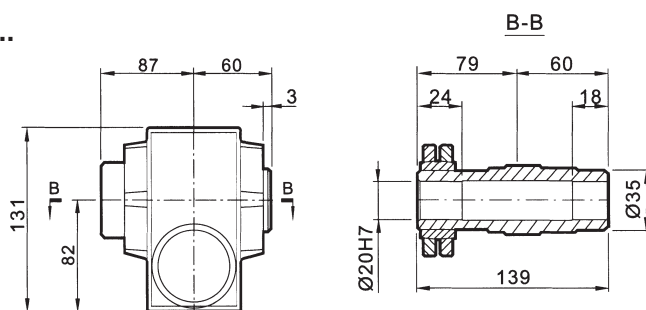

尺寸 Dimensions	电机规格 Motor frame										
	63	71	80	90							
G	132	145	145	197							
G1	99	122	122	154							
G1B	99	127	127	161							
K	334	349	399	419							
KB	389	413	463	504							
KM	191	206	256	276							

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

安装尺寸

Mounting Dimensions

ME47...

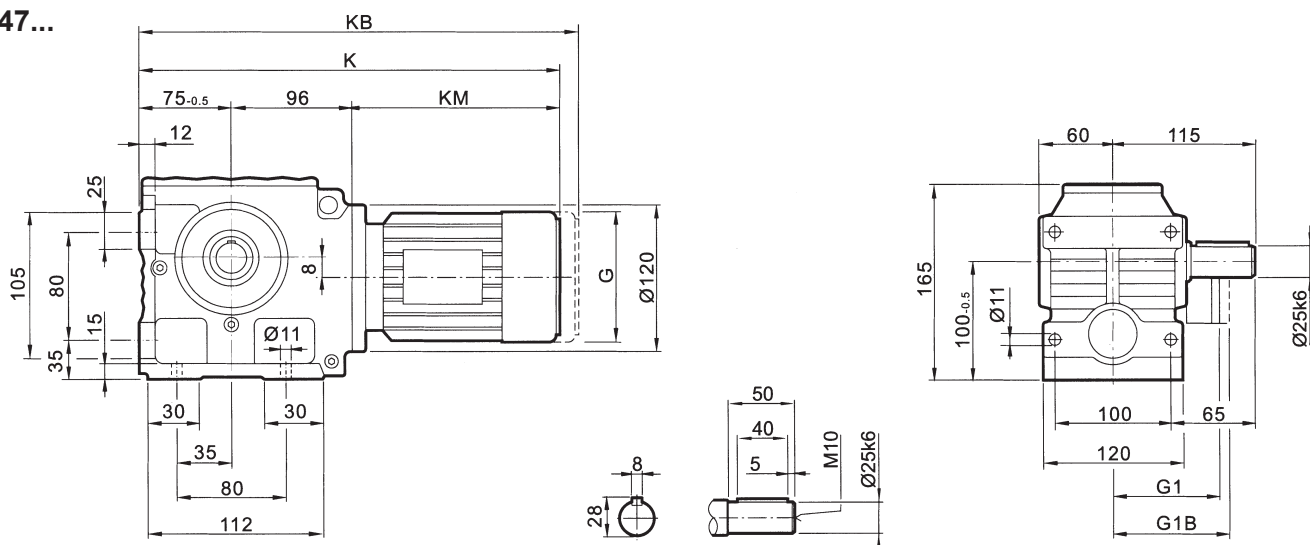

尺寸 Dimensions	电机规格				Motor frame						
	63	71	80	90							
G	132	145	145	197							
G1	99	122	122	154							
G1B	99	127	127	161							
K	362	377	427	447							
KB	417	441	491	532							
KM	191	206	256	276							

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEF47...

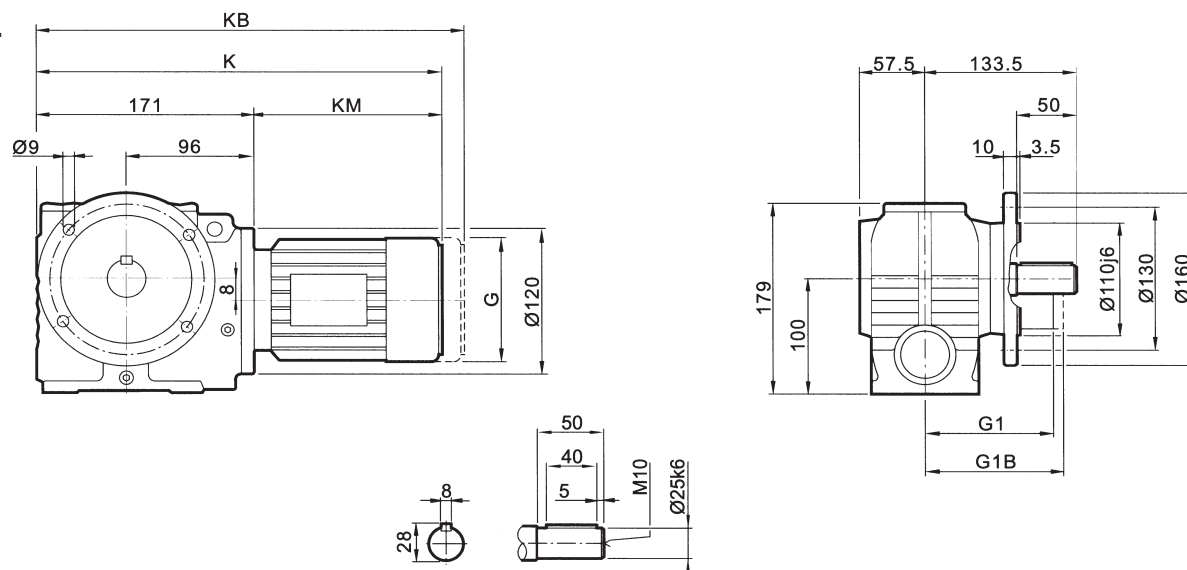

MEAF47...

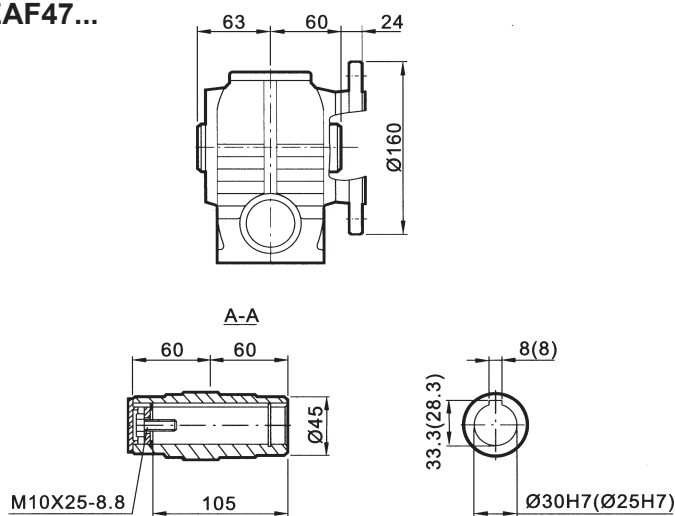

MEHF47...

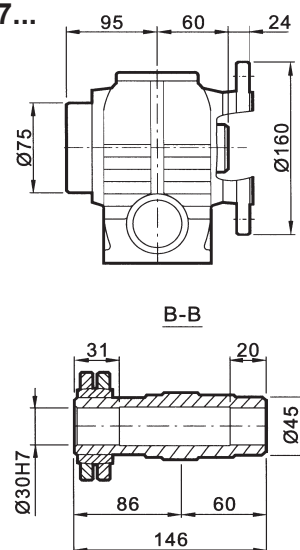

尺寸 Dimensions	电机规格				Motor frame					
	63	71	80	90						
G	132	145	145	197						
G1	99	122	122	154						
G1B	99	127	127	161						
K	362	377	427	447						
KB	417	441	491	532						
KM	191	206	256	276						

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEA47...

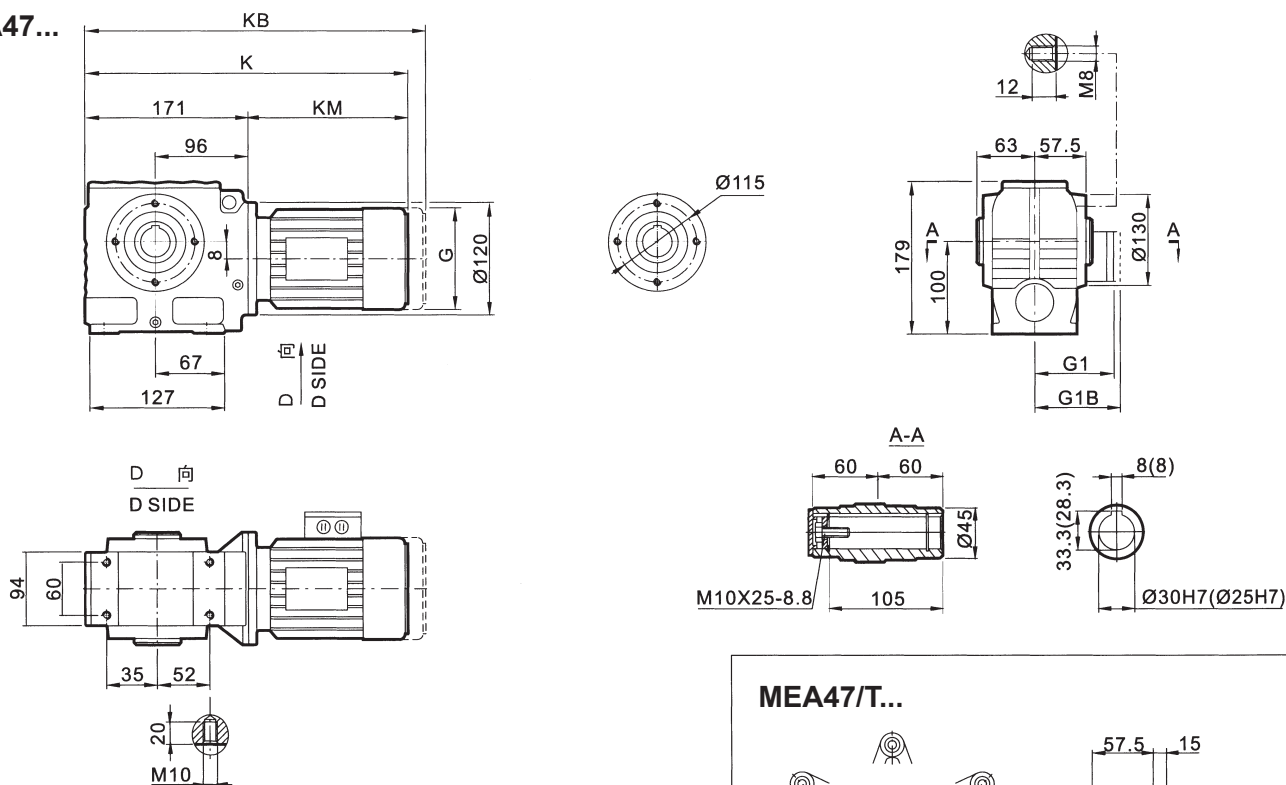

MEH47...

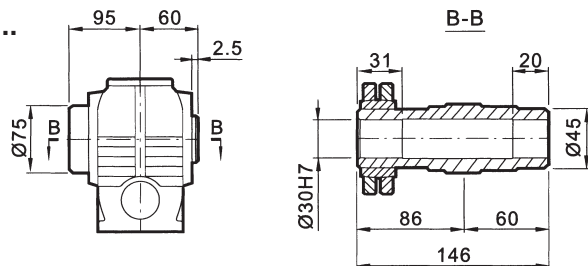

MEA47/T...

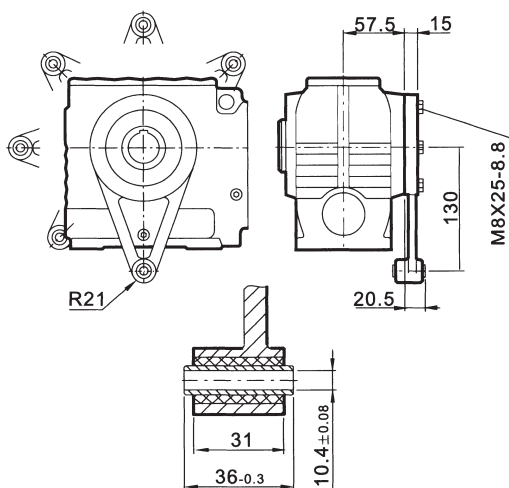

尺寸 Dimensions	电机规格 Motor frame									
	63	71	80	90						
G	132	145	145	197						
G1	99	122	122	154						
G1B	99	127	127	161						
K	362	377	427	447						
KB	417	441	491	532						
KM	191	206	256	276						

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions

MEAZ47...

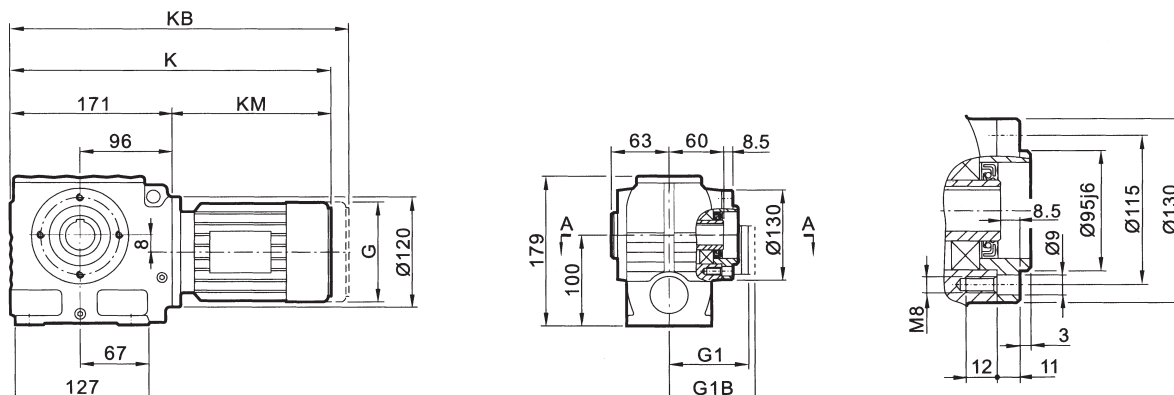

MEHZ47...

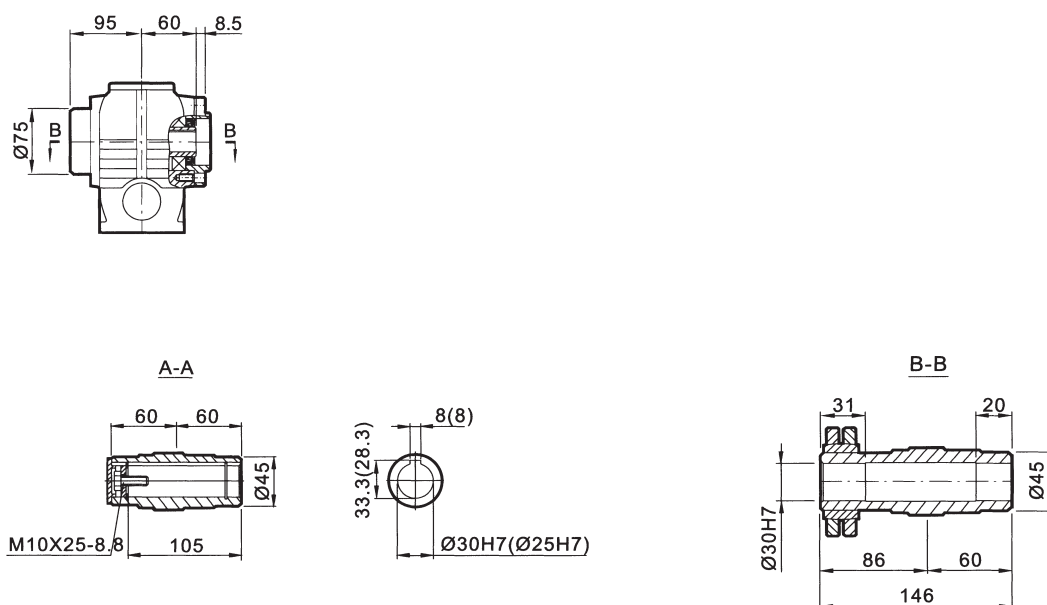

尺寸 Dimensions	电机规格				Motor frame						
	63	71	80	90							
G	132	145	145	197							
G1	99	122	122	154							
G1B	99	127	127	161							
K	362	377	427	447							
KB	417	441	491	532							
KM	191	206	256	276							

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

安装尺寸

Mounting Dimensions

ME57...

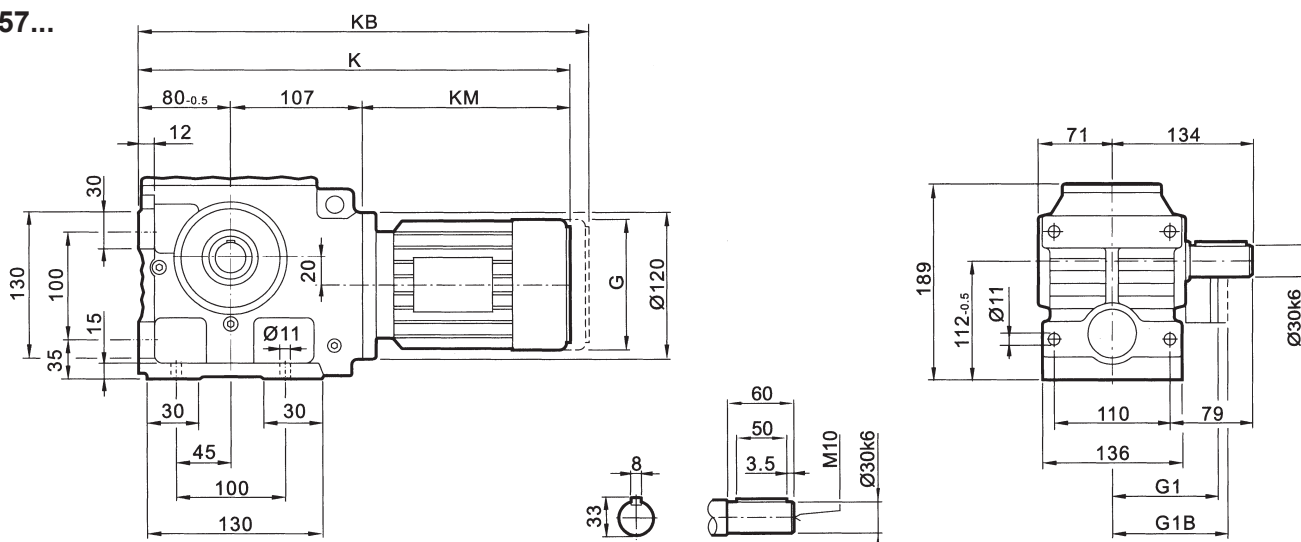

尺寸 Dimensions	电机规格						Motor frame				
	63	71	80	90	100M	100L					
G	132	145	145	197	197	197					
G1	105	122	122	154	166	166					
G1B	105	127	127	161	166	166					
K	378	393	443	463	515	545					
KB	433	456	506	548	600	630					
KM	191	206	256	276	328	358					

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEF57...

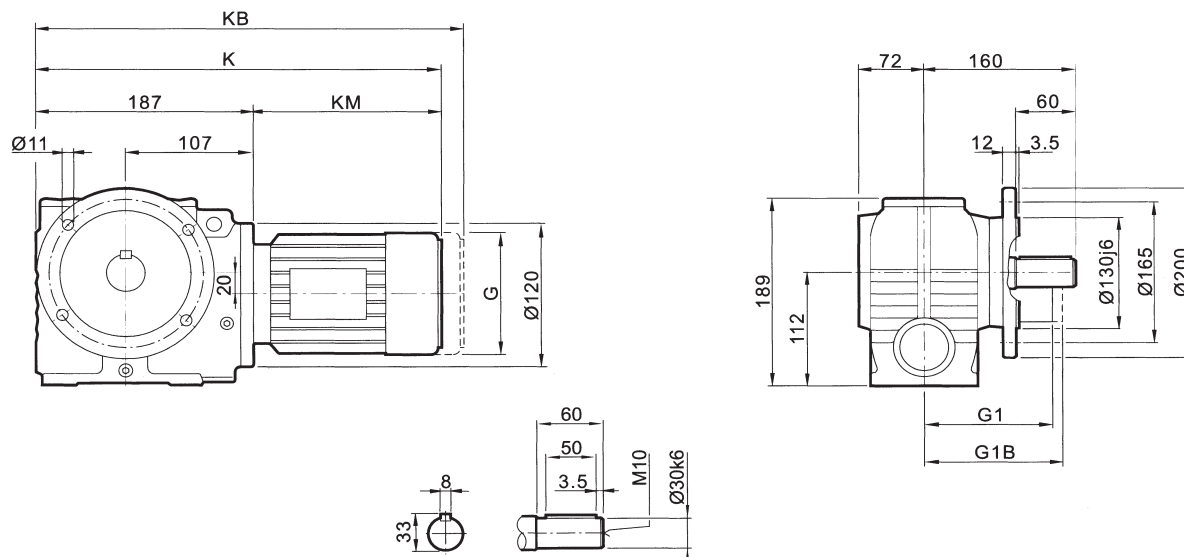

MEAF57...

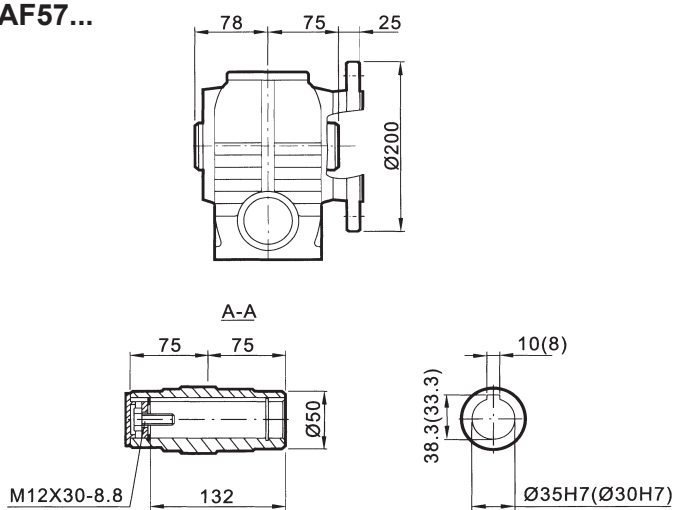

MEHF57...

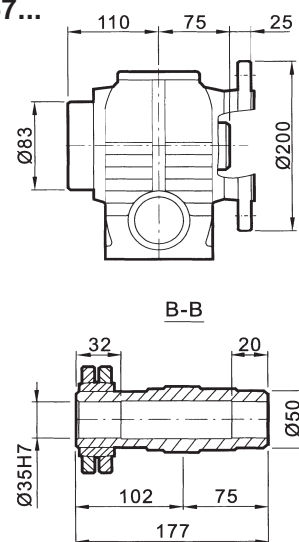

尺寸 Dimensions	电机规格 Motor frame										
	63	71	80	90	100M	100L					
G	132	145	145	197	197	197					
G1	105	122	122	154	166	166					
G1B	105	127	127	161	166	166					
K	378	393	443	463	515	545					
KB	433	456	506	548	600	630					
KM	191	206	256	276	328	358					

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEA57...

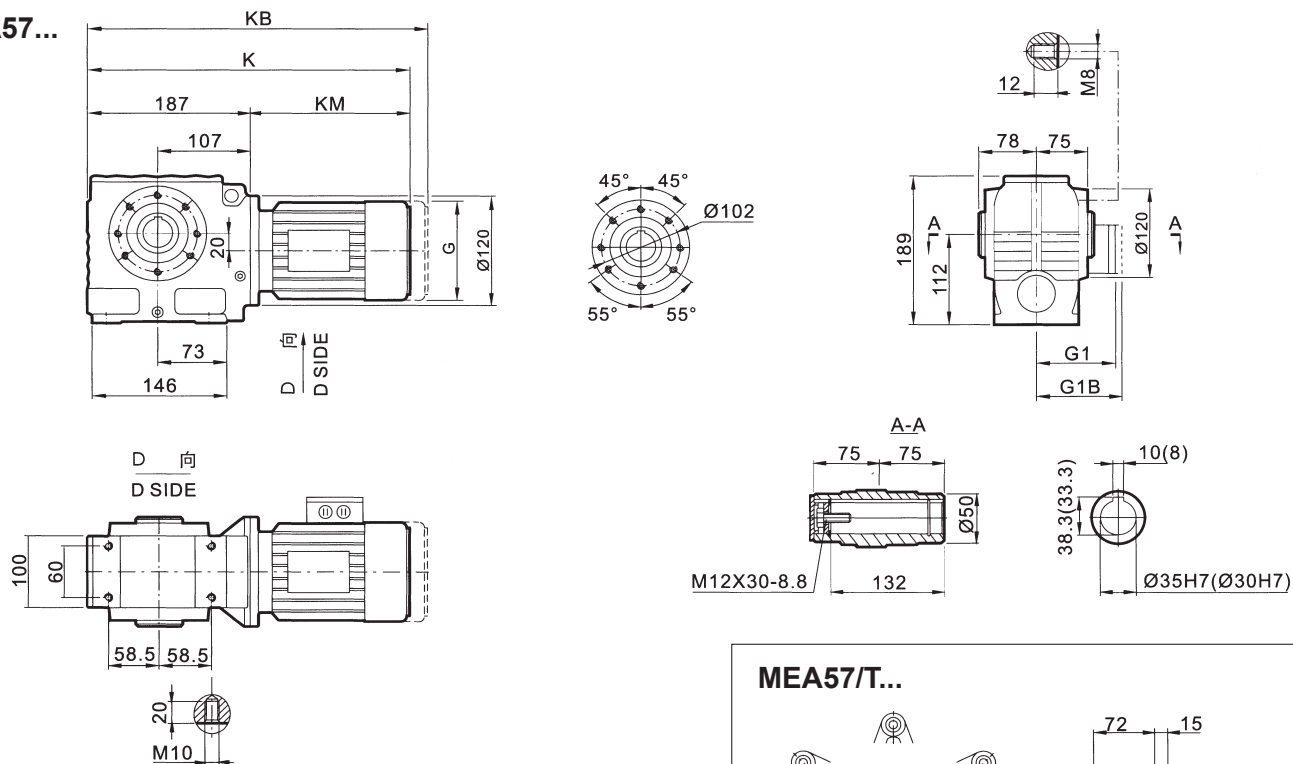

MEH57...

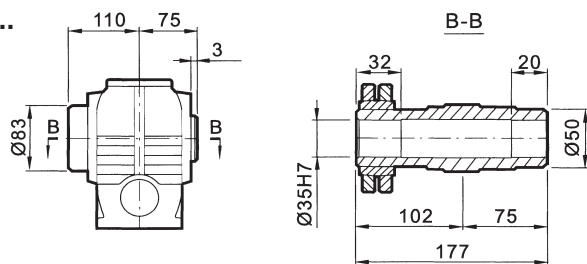

MEA57/T...

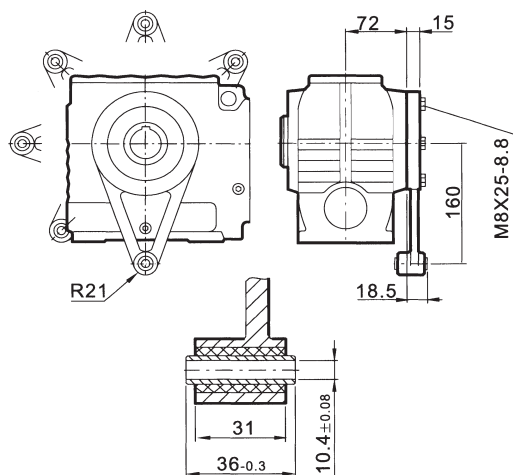

尺寸 Dimensions	电机规格 Motor frame										
	63	71	80	90	100M	100L					
G	132	145	145	197	197	197					
G1	105	122	122	154	166	166					
G1B	105	127	127	161	166	166					
K	378	393	443	463	515	545					
KB	433	456	506	548	600	630					
KM	191	206	256	276	328	358					

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions

MEAZ57...

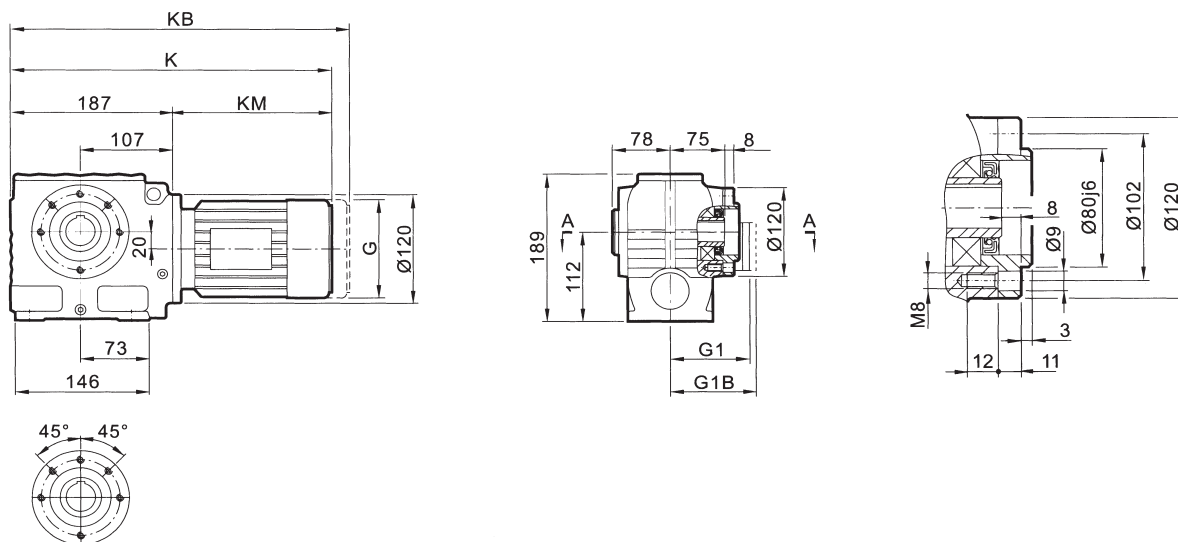

MEHZ57...

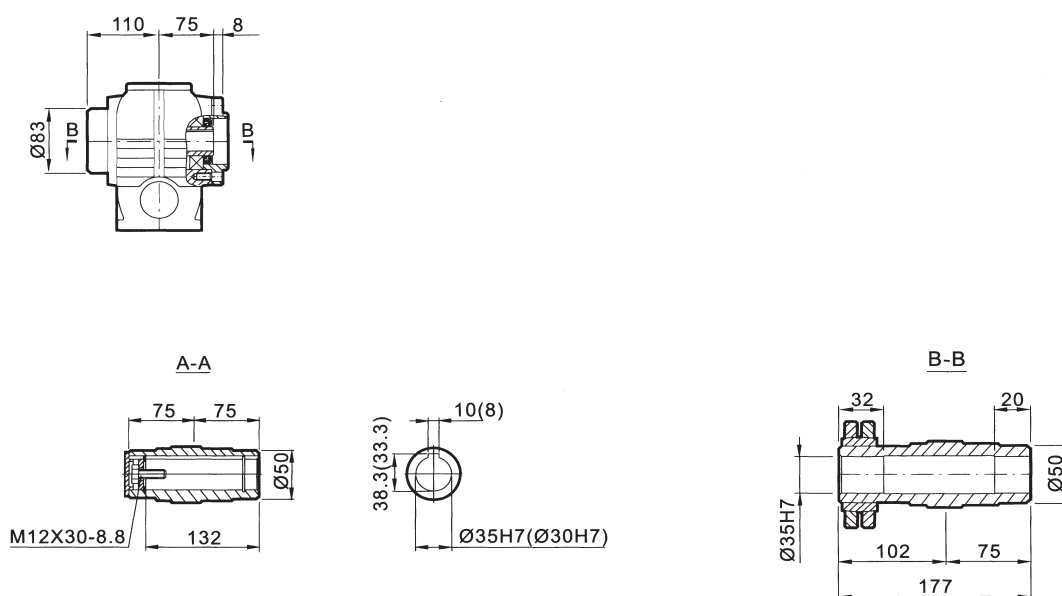

尺寸 Dimensions	电机规格 Motor frame										
	63	71	80	90	100M	100L					
G	132	145	145	197	197	197					
G1	105	122	122	154	166	166					
G1B	105	127	127	161	166	166					
K	378	393	443	463	515	545					
KB	433	456	506	548	600	630					
KM	191	206	256	276	328	358					

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

安装尺寸

Mounting Dimensions

ME67...

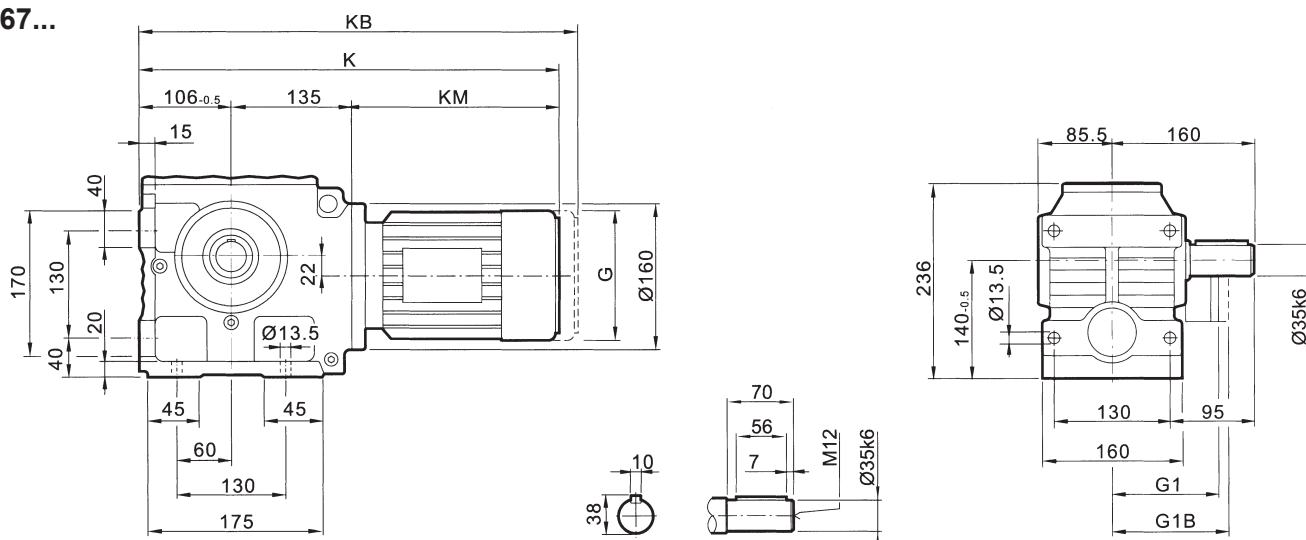

尺寸 Dimensions	电机规格									Motor frame		
	63	71	80	90	100M	100L	112M	132S				
G	132	145	145	197	197	197	221	221				
G1	105	122	122	154	166	166	179	179				
G1B	105	127	127	161	166	166	182	182				
K	427	441	491	511	561	591	596	644				
KB	482	505	555	596	646	676	676	724				
KM	185	199	249	269	319	349	354	402				

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEF67...

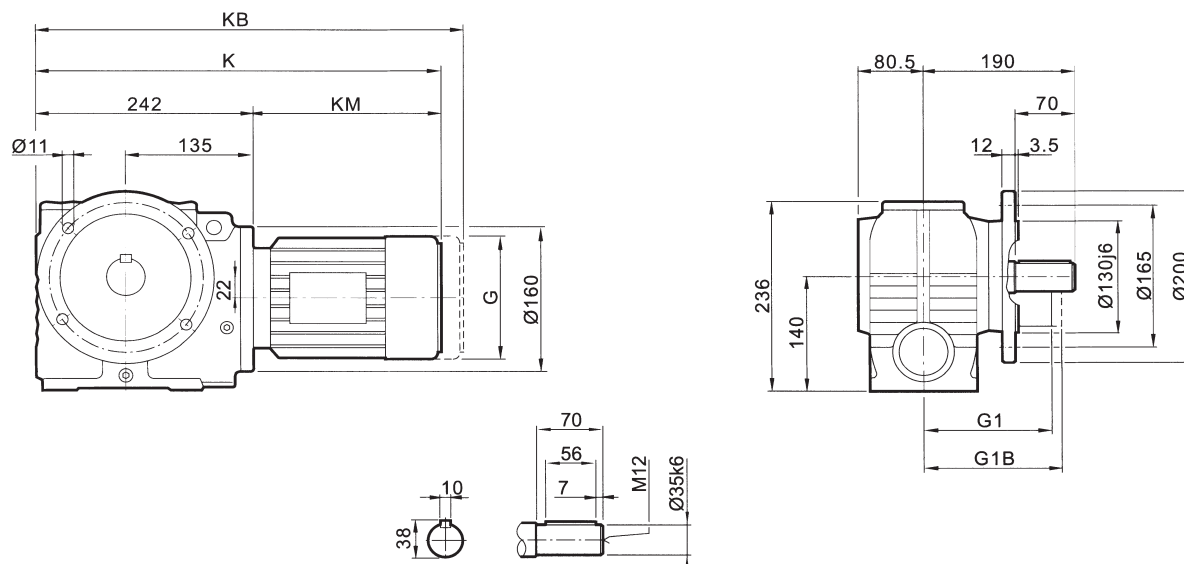

MEAF67...

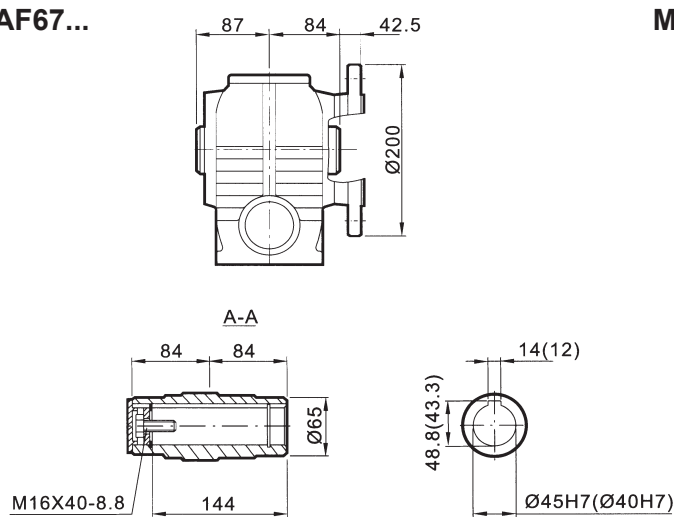

MEHF67...

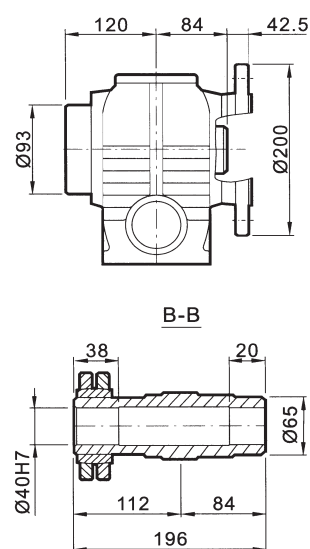

尺寸 Dimensions	电机规格 Motor frame								
	63	71	80	90	100M	100L	112M	132S	
G	132	145	145	197	197	197	221	221	
G1	105	122	122	154	166	166	179	179	
G1B	105	127	127	161	166	166	182	182	
K	427	441	491	511	561	591	596	644	
KB	482	505	555	596	646	676	676	724	
KM	185	199	249	269	319	349	354	402	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEA67...

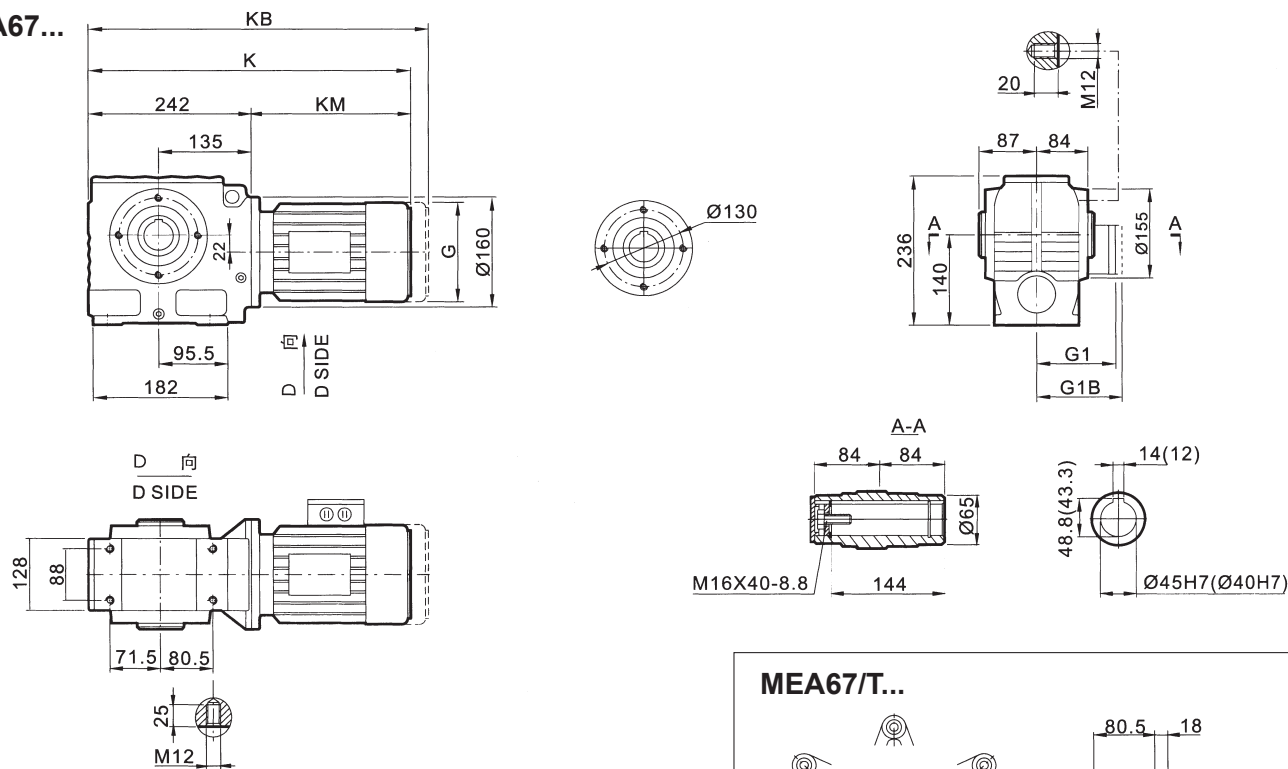

MEH67...

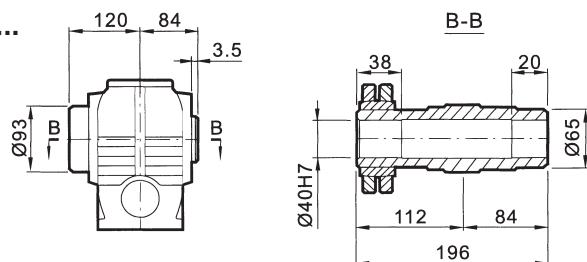

MEA67/T...

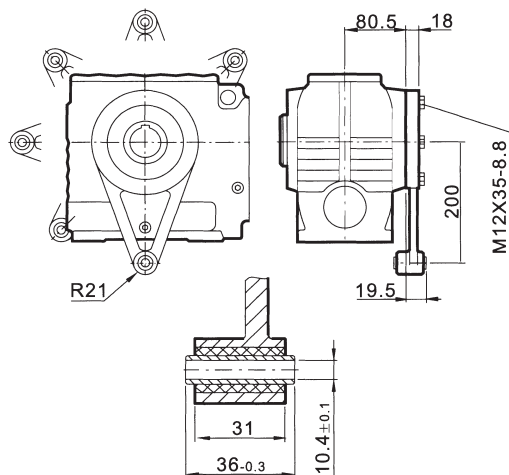

尺寸 Dimensions	电机规格 Motor frame								
	63	71	80	90	100M	100L	112M	132S	
G	132	145	145	197	197	197	221	221	
G1	105	122	122	154	166	166	179	179	
G1B	105	127	127	161	166	166	182	182	
K	427	441	491	511	561	591	596	644	
KB	482	505	555	596	646	676	676	724	
KM	185	199	249	269	319	349	354	402	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions

MEAZ67...

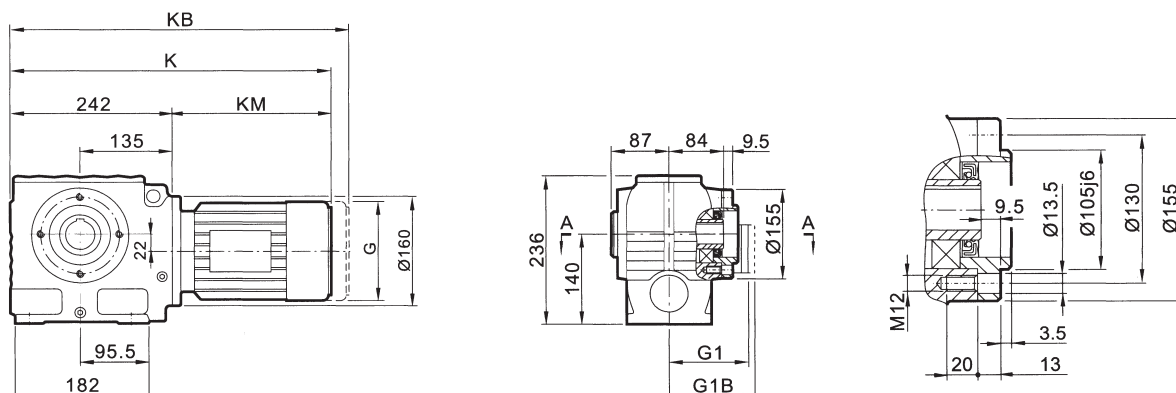

MEHZ67...

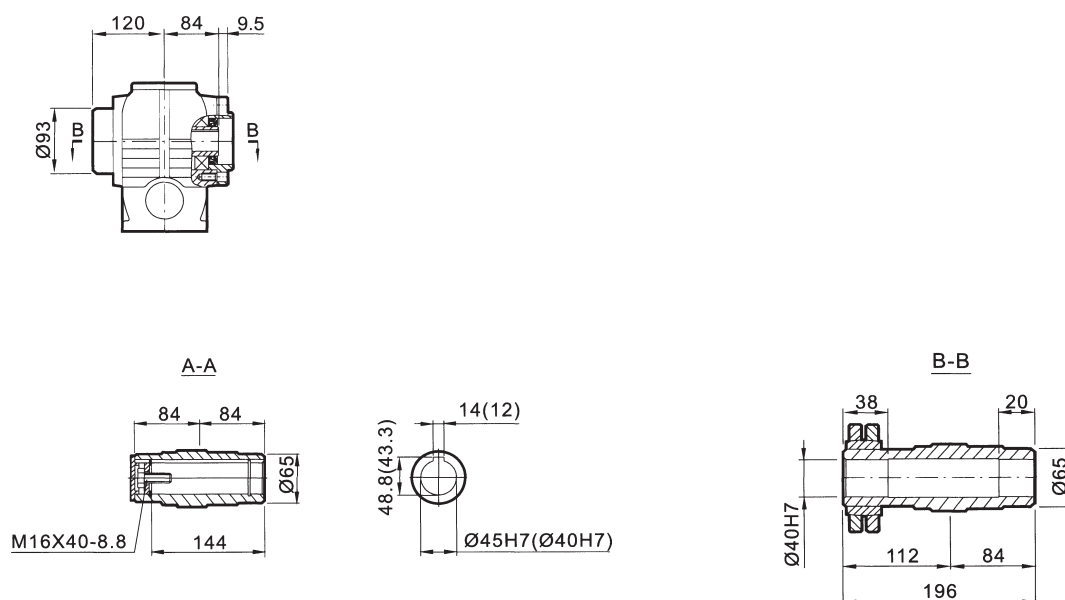

尺寸 Dimensions	电机规格 Motor frame								
	63	71	80	90	100M	100L	112M	132S	
G	132	145	145	197	197	197	221	221	
G1	105	122	122	154	166	166	179	179	
G1B	105	127	127	161	166	166	182	182	
K	427	441	491	511	561	591	596	644	
KB	482	505	555	596	646	676	676	724	
KM	185	199	249	269	319	349	354	402	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机, 辊道电机, 船用电机等需加过渡法兰, 见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

安装尺寸

Mounting Dimensions

ME77...

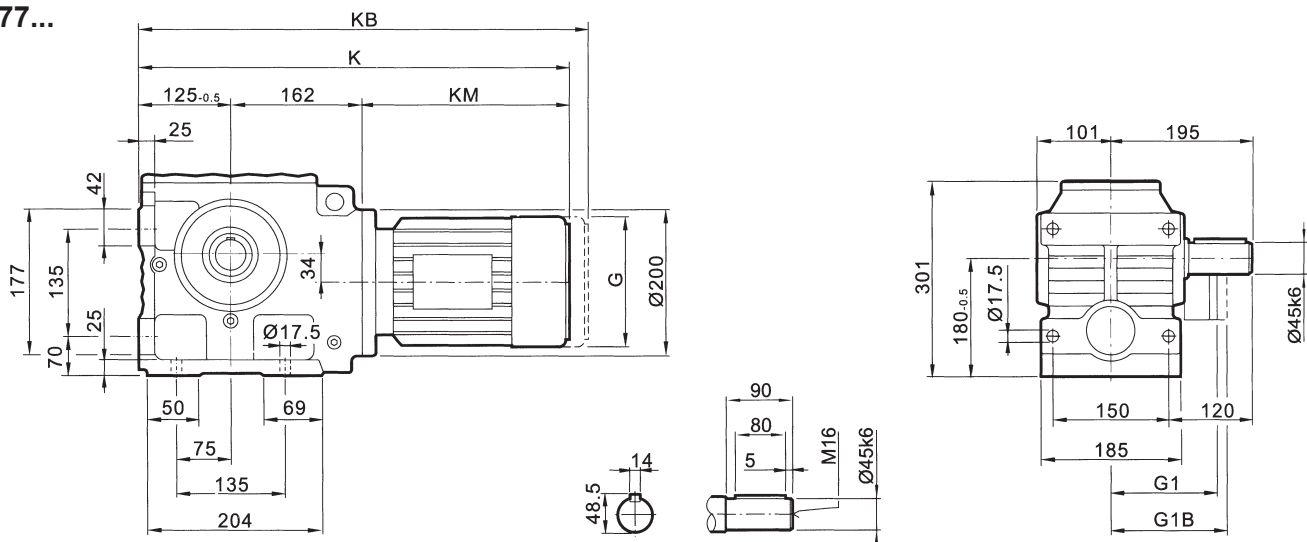

尺寸 Dimensions	电机规格								Motor frame			
	80	90	100M	100L	112M	132S	132M					
G	145	197	197	197	221	221	275					
G1	122	154	166	166	179	179	230					
G1B	127	161	166	166	182	182	230					
K	530	548	598	628	632	677	699					
KB	594	633	683	713	712	757	811					
KM	243	261	311	341	345	390	412					

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机, 辊道电机, 船用电机等需加过渡法兰, 见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEF77...

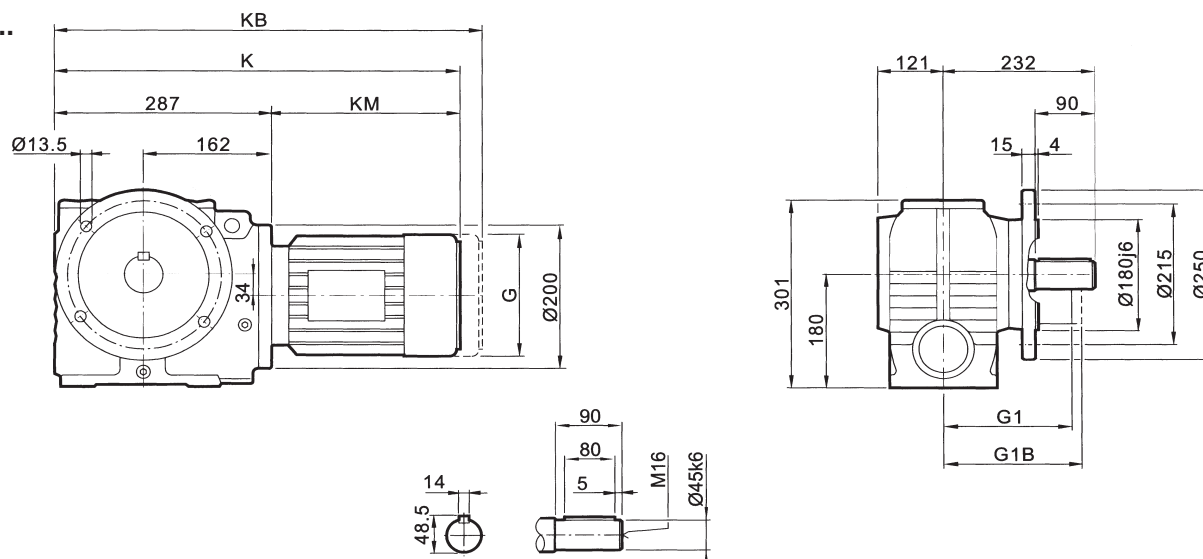

MEAF77...

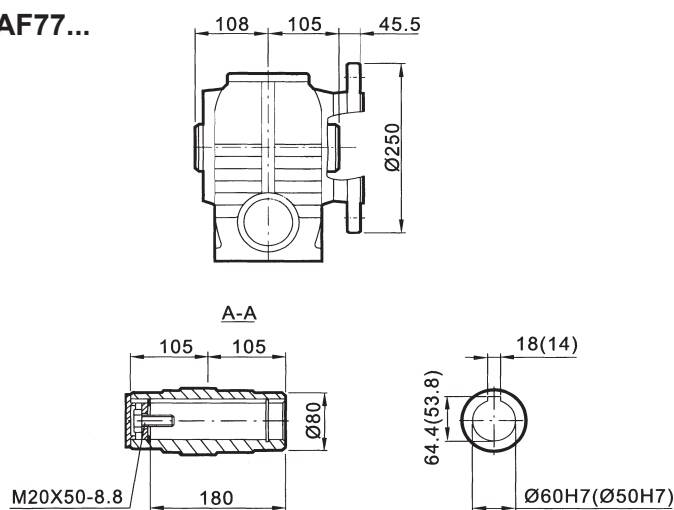

MEHF77...

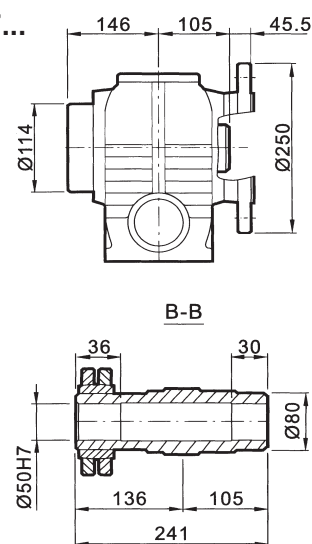

尺寸 Dimensions	电机规格 Motor frame										
	80	90	100M	100L	112M	132S	132M				
G	145	197	197	197	221	221	275				
G1	122	154	166	166	179	179	230				
G1B	127	161	166	166	182	182	230				
K	530	548	598	628	632	677	699				
KB	594	633	683	713	712	757	811				
KM	243	261	311	341	345	390	412				

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.



安装尺寸

Mounting Dimensions

MEA77...

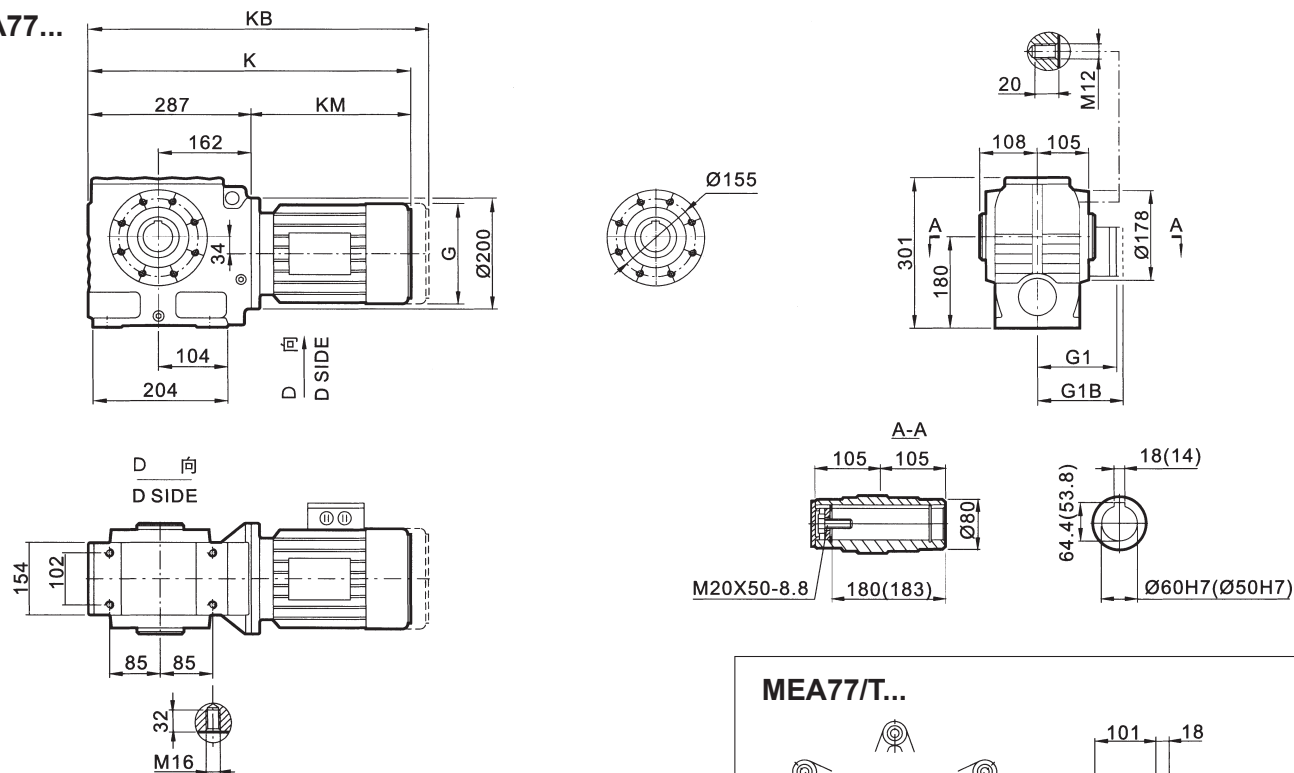

MEH77...

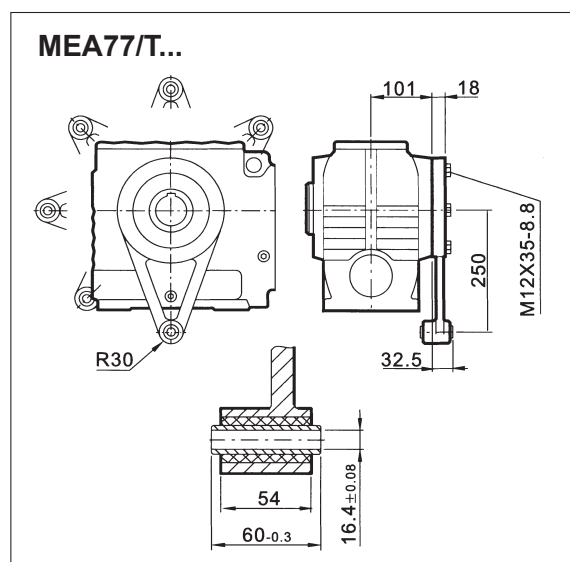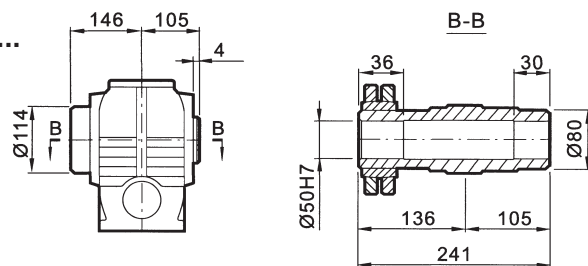

尺寸 Dimensions	电机规格 Motor frame										
	80	90	100M	100L	112M	132S	132M				
G	145	197	197	197	221	221	275				
G1	122	154	166	166	179	179	230				
G1B	127	161	166	166	182	182	230				
K	530	548	598	628	632	677	699				
KB	594	633	683	713	712	757	811				
KM	243	261	311	341	345	390	412				

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions

MEAZ77...

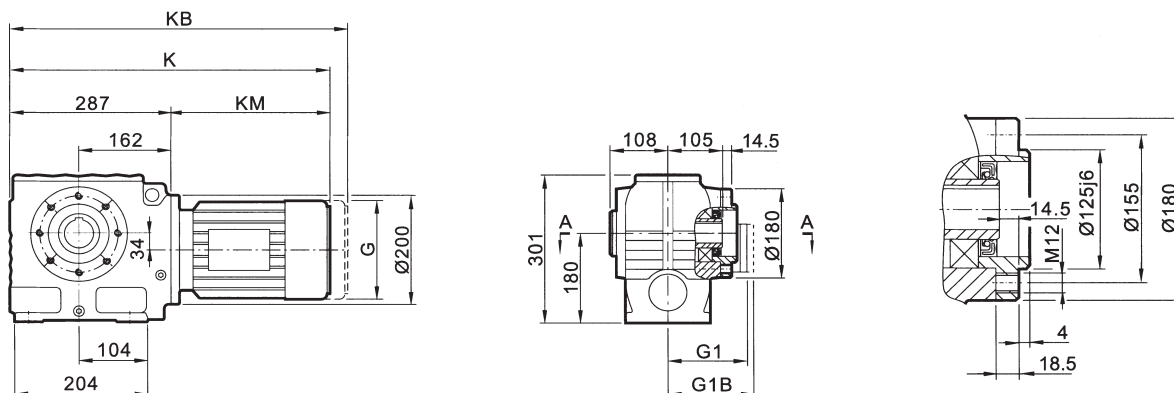

MEHZ77...

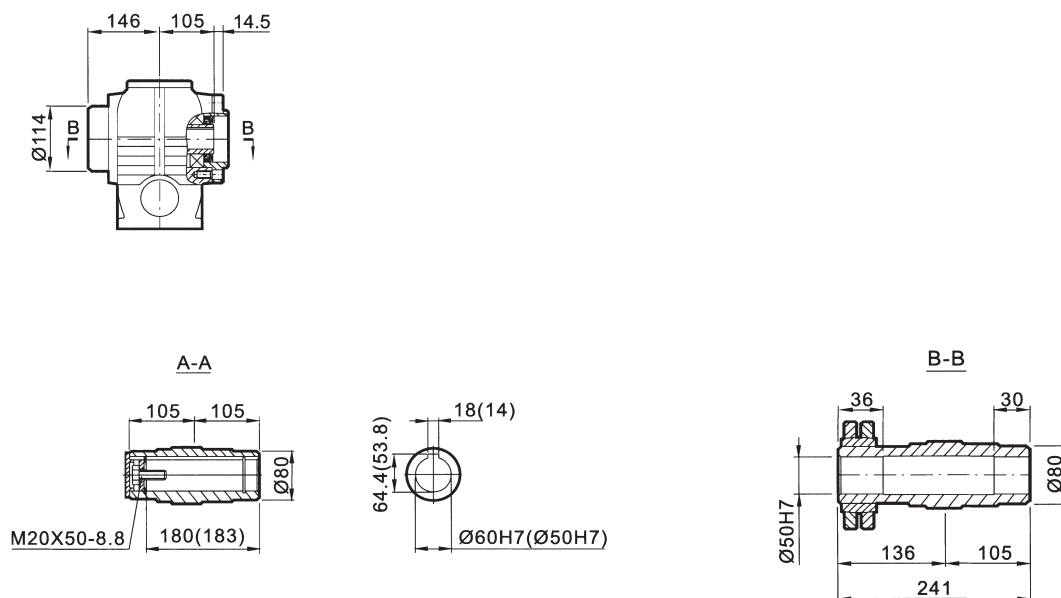

尺寸 Dimensions	电机规格 Motor frame										
	80	90	100M	100L	112M	132S	132M				
G	145	197	197	197	221	221	275				
G1	122	154	166	166	179	179	230				
G1B	127	161	166	166	182	182	230				
K	530	548	598	628	632	677	699				
KB	594	633	683	713	712	757	811				
KM	243	261	311	341	345	390	412				

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

安装尺寸

Mounting Dimensions

ME87...

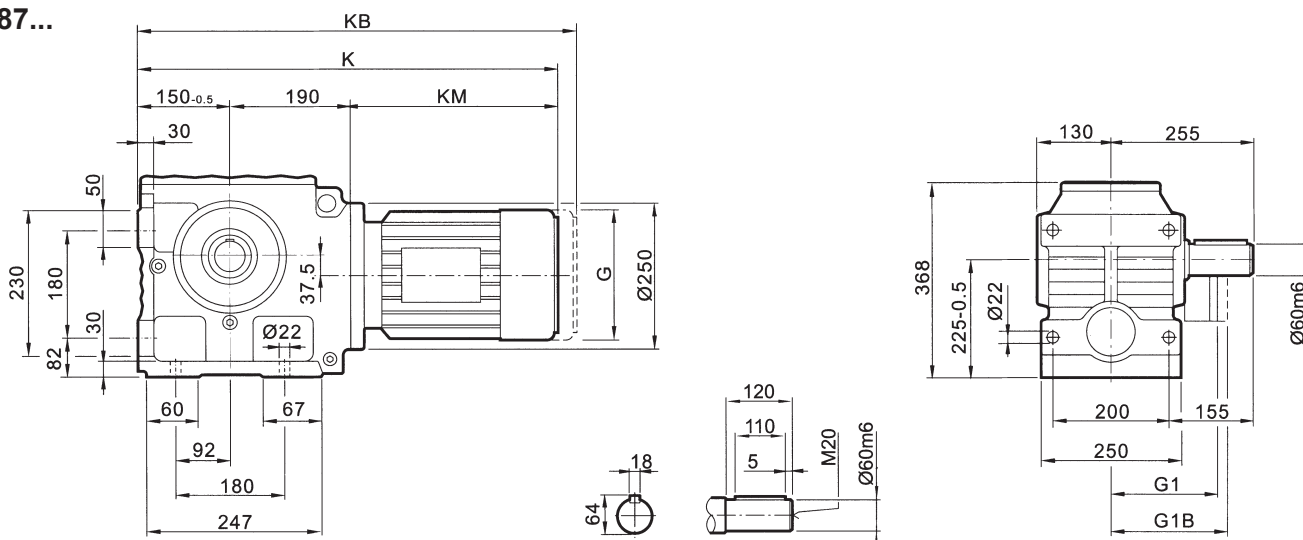

尺寸 Dimensions	电机规格									
	80	90	100M	100L	112M	132S	132M	160M	160L	
G	145	197	197	197	221	221	275	275	331	
G1	122	154	166	166	179	179	230	230	258	
G1B	127	161	166	166	182	182	230	230	258	
K	578	597	647	677	680	725	747	807	854	
KB	642	682	732	762	760	805	859	919	1010	
KM	238	257	307	337	340	385	407	467	514	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions


MEF87...

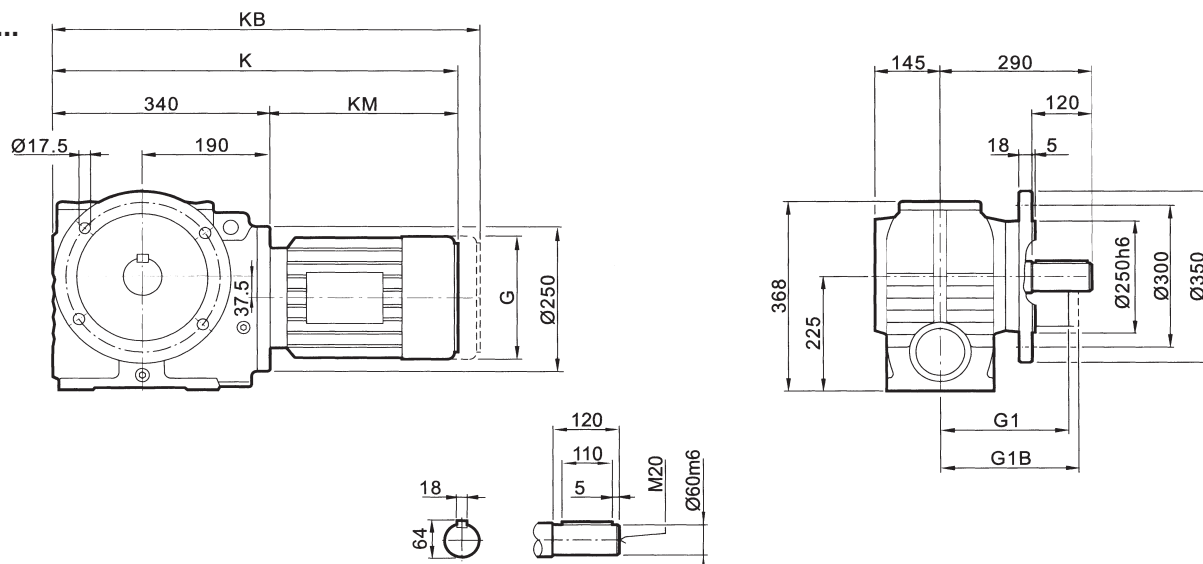

MEAF87...

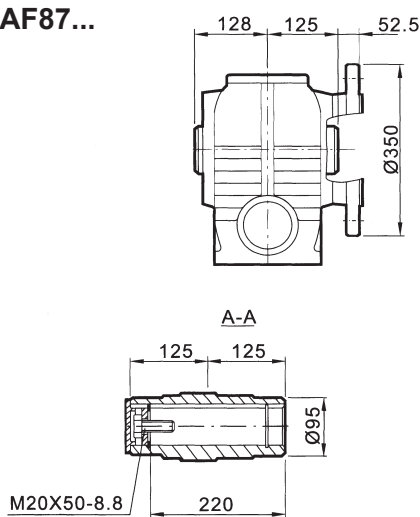

MEHF87...

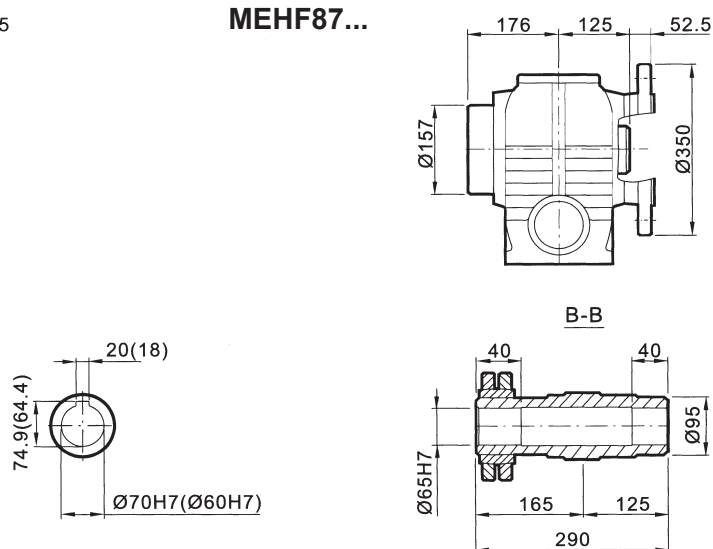

尺寸 Dimensions	电机规格 Motor frame									
	80	90	100M	100L	112M	132S	132M	160M	160L	
G	145	197	197	197	221	221	275	275	331	
G1	122	154	166	166	179	179	230	230	258	
G1B	127	161	166	166	182	182	230	230	258	
K	578	597	647	677	680	725	747	807	854	
KB	642	682	732	762	760	805	859	919	1010	
KM	238	257	307	337	340	385	407	467	514	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.



安装尺寸

Mounting Dimensions

MEA87...

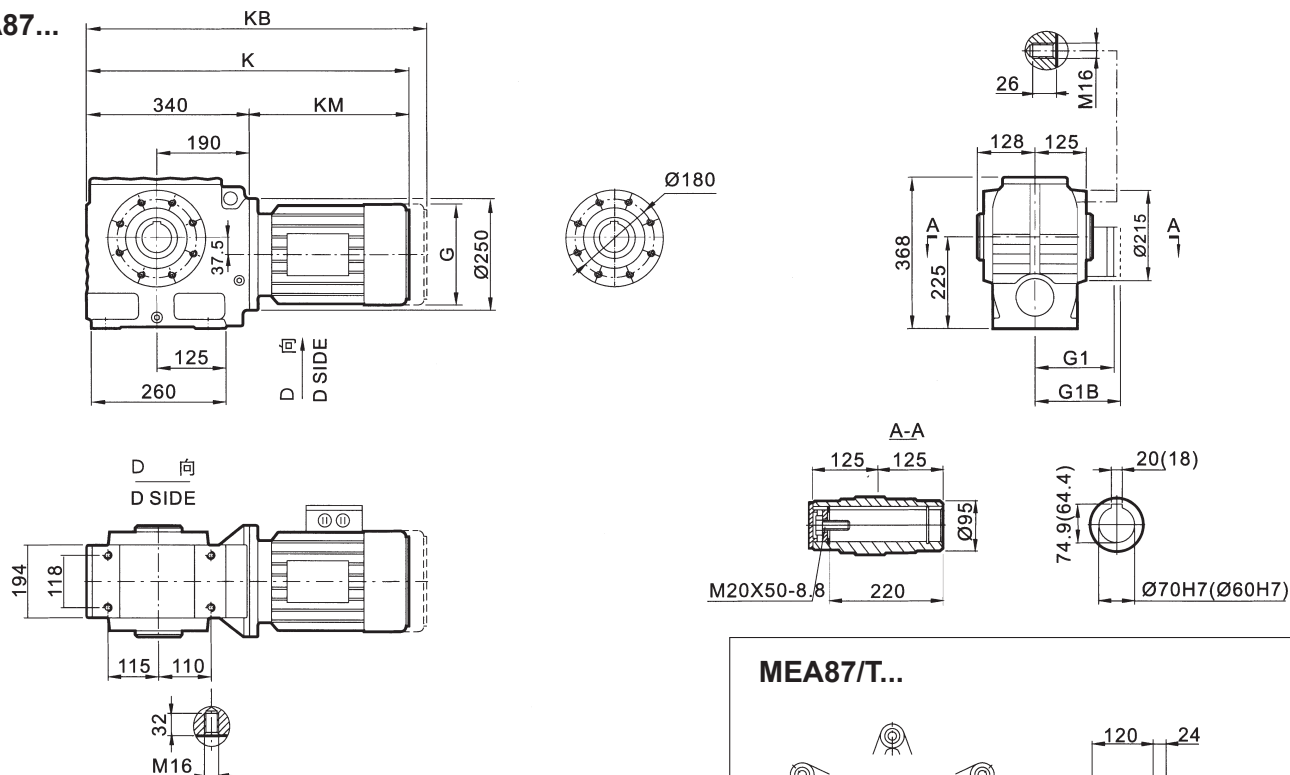

MEH87...

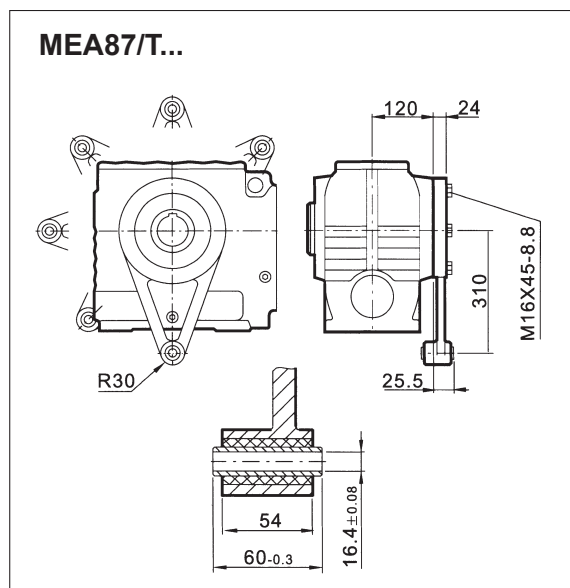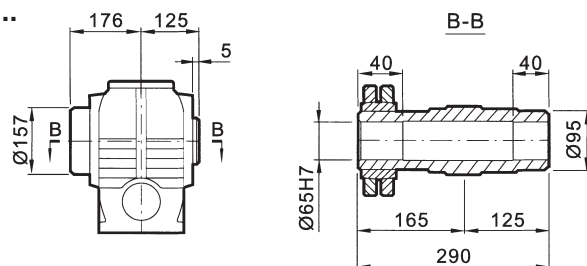

尺寸 Dimensions	电机规格 Motor frame									
	80	90	100M	100L	112M	132S	132M	160M	160L	
G	145	197	197	197	221	221	275	275	331	
G1	122	154	166	166	179	179	230	230	258	
G1B	127	161	166	166	182	182	230	230	258	
K	578	597	647	677	680	725	747	807	854	
KB	642	682	732	762	760	805	859	919	1010	
KM	238	257	307	337	340	385	407	467	514	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions

MEAZ87...

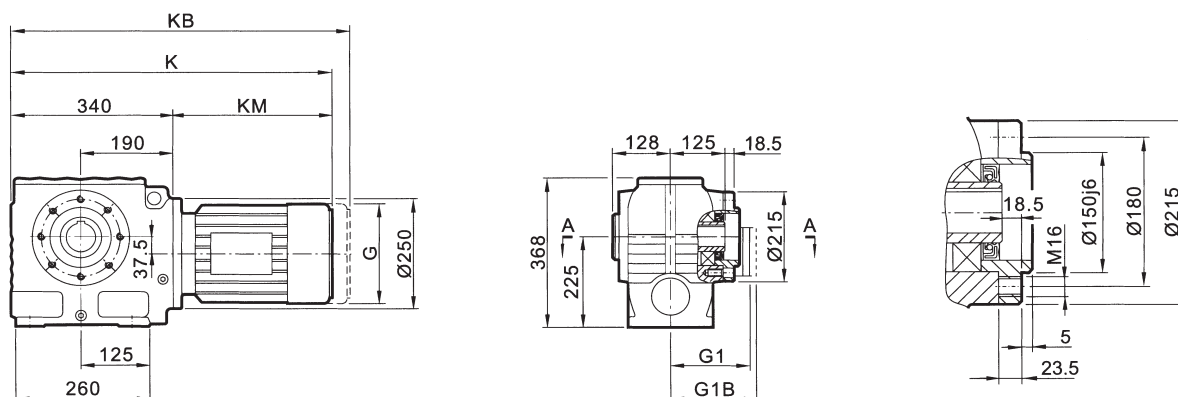

MEHZ87...

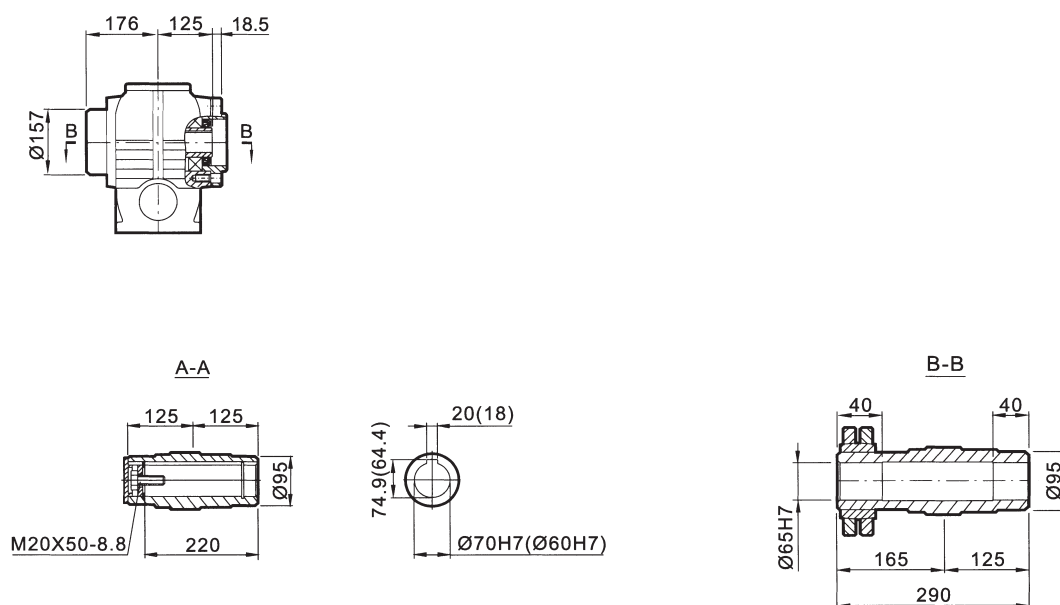

尺寸 Dimensions	电机规格 Motor frame									
	80	90	100M	100L	112M	132S	132M	160M	160L	
G	145	197	197	197	221	221	275	275	331	
G1	122	154	166	166	179	179	230	230	258	
G1B	127	161	166	166	182	182	230	230	258	
K	578	597	647	677	680	725	747	807	854	
KB	642	682	732	762	760	805	859	919	1010	
KM	238	257	307	337	340	385	407	467	514	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;


G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。

ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

ME97...

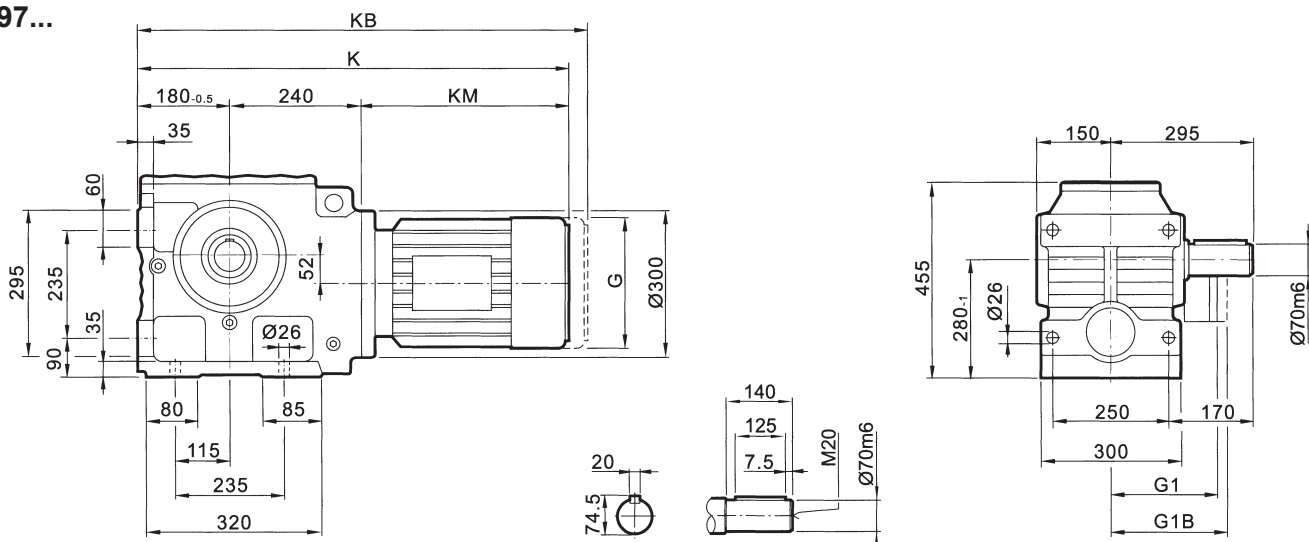

尺寸 Dimensions	电机规格 Motor frame										
	80	90	100M	100L	112M	132S	132M	160M	160L	180	
G	145	197	197	197	221	221	275	275	331	331	
G1	122	154	166	166	179	179	230	230	258	258	
G1B	127	161	166	166	182	182	230	230	258	258	
K	651	671	721	751	755	800	822	882	929	1001	
KB	715	756	806	836	835	880	934	994	1085	1157	
KM	238	251	301	331	335	380	402	462	509	581	

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸:

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions




MEF97...

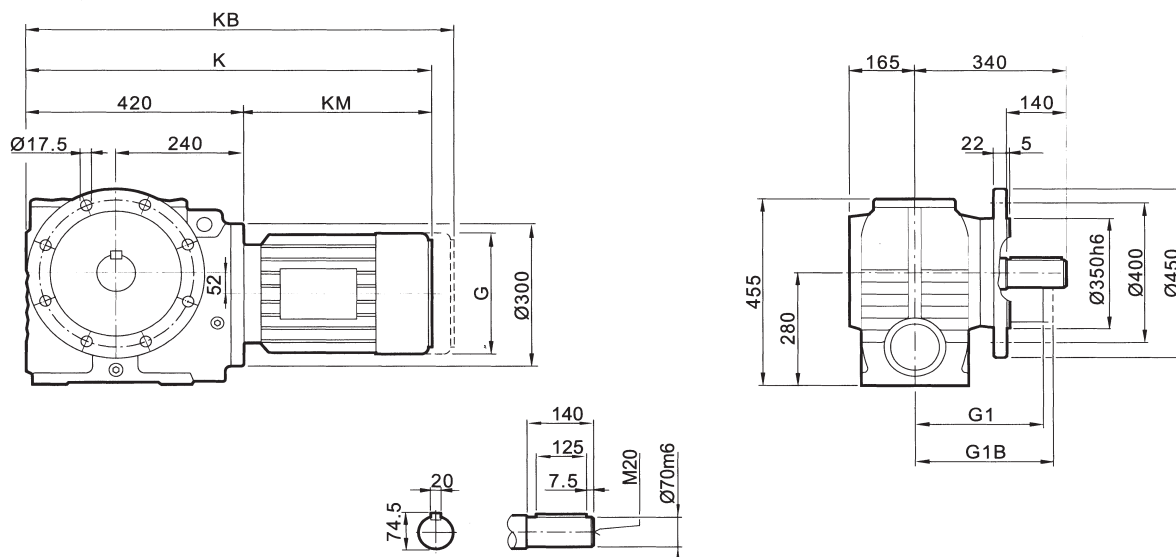

MEAF97...



MEHF97...

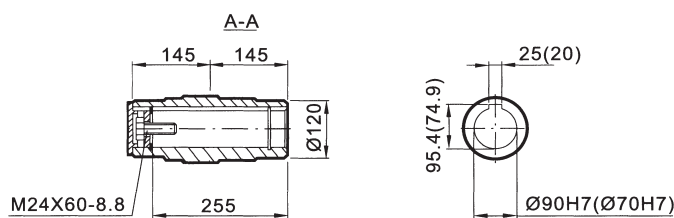

尺寸 Dimensions	电机规格 Motor frame									
	80	90	100M	100L	112M	132S	132M	160M	160L	180
G	145	197	197	197	221	221	275	275	331	331
G1	122	154	166	166	179	179	230	230	258	258
G1B	127	161	166	166	182	182	230	230	258	258
K	651	671	721	751	755	800	822	882	929	1001
KB	715	756	806	836	835	880	934	994	1085	1157
KM	238	251	301	331	335	380	402	462	509	581

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.



安装尺寸

Mounting Dimensions

MEA97...

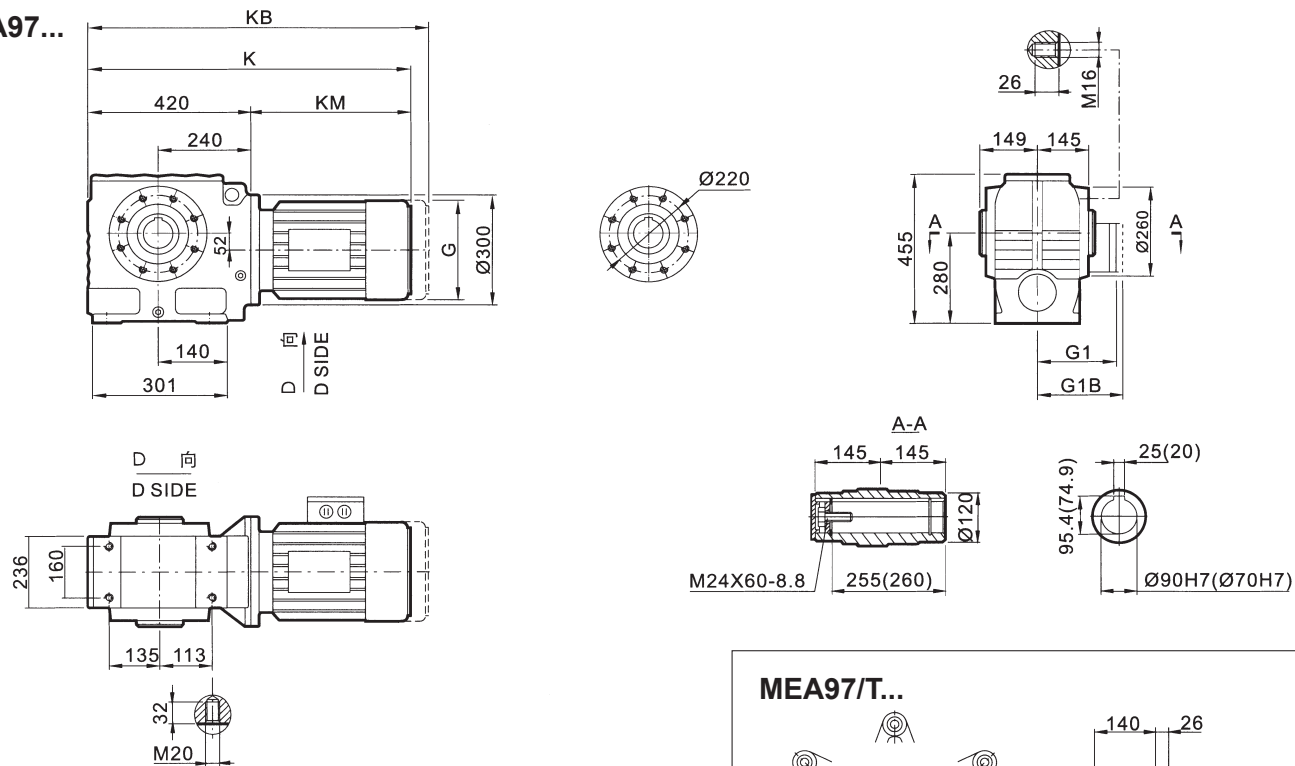

MEH97...

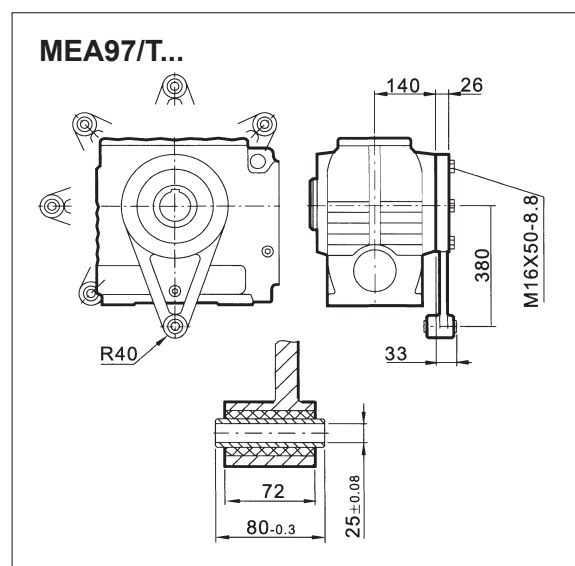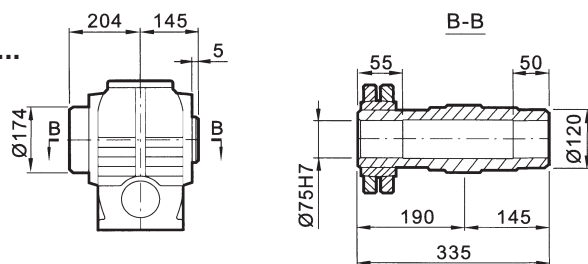

尺寸 Dimensions	电机规格 Motor frame									
	80	90	100M	100L	112M	132S	132M	160M	160L	180
G	145	197	197	197	221	221	275	275	331	331
G1	122	154	166	166	179	179	230	230	258	258
G1B	127	161	166	166	182	182	230	230	258	258
K	651	671	721	751	755	800	822	882	929	1001
KB	715	756	806	836	835	880	934	994	1085	1157
KM	238	251	301	331	335	380	402	462	509	581

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机,辊道电机,船用电机等需加过渡法兰,见431页。


ATTENTION

Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.


安装尺寸

Mounting Dimensions

MEAZ97...

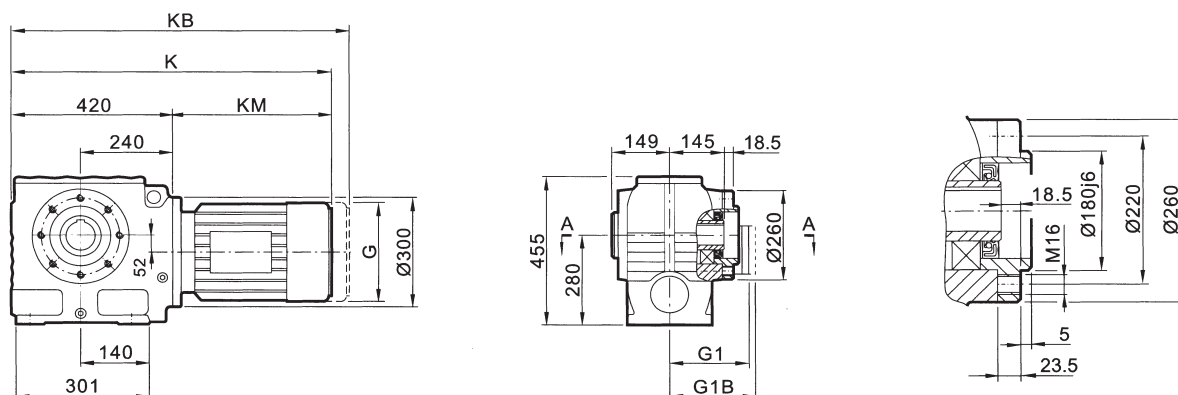

MEHZ97...

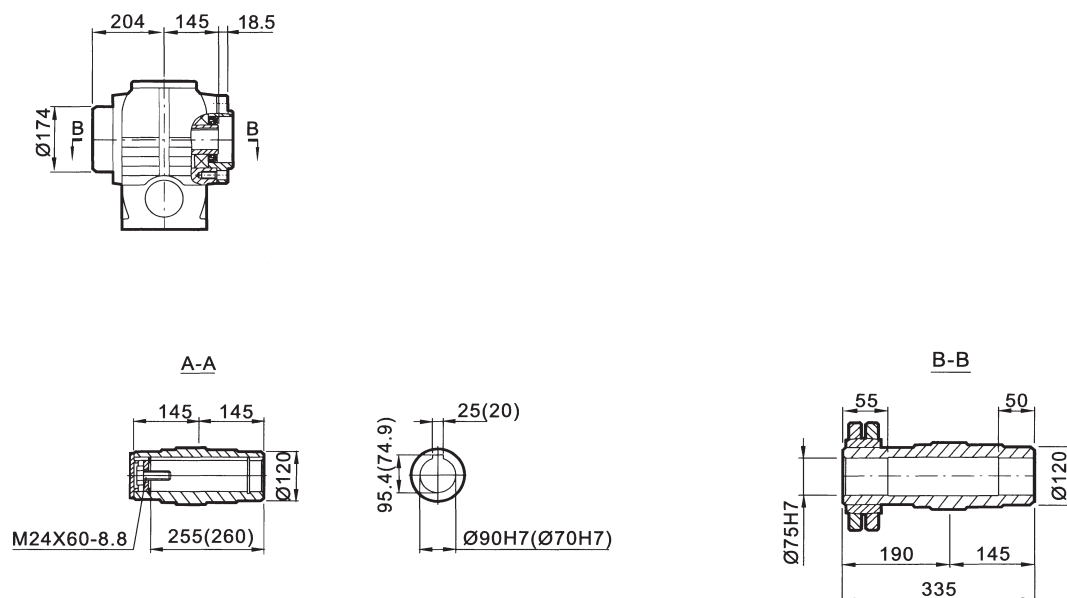

尺寸 Dimensions	电机规格 Motor frame									
	80	90	100M	100L	112M	132S	132M	160M	160L	180
G	145	197	197	197	221	221	275	275	331	331
G1	122	154	166	166	179	179	230	230	258	258
G1B	127	161	166	166	182	182	230	230	258	258
K	651	671	721	751	755	800	822	882	929	1001
KB	715	756	806	836	835	880	934	994	1085	1157
KM	238	251	301	331	335	380	402	462	509	581

尺寸说明

以上尺寸为直联普通电机和制动电机尺寸;

G1B, KB为制动电机尺寸,其余为普通电机尺寸;

防爆电机, 辊道电机, 船用电机等需加过渡法兰, 见431页。

ATTENTION


Dimensions of general and brake motor shown in upon table, the others like explosion, roller, or marine motor coupled by adaptor, the dimensions on page 431.

安装尺寸

Mounting Dimensions

组合型尺寸

Combinations

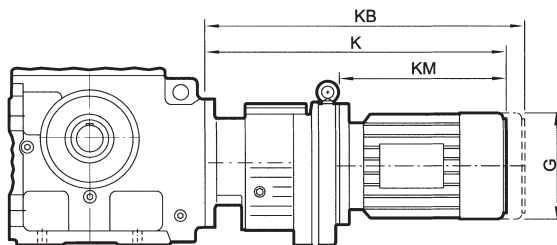


		G	K	KB	KM
ME..37MK17	63..	132	338	395	163
	71..	145	339	403	164
	80..	145	389	453	214
ME..47MK37 ME..57MK37	63..	132	370	427	205
	71..	145	371	435	206
	80..	145	421	485	256
ME..67MK37	63..	132	362	419	205
	71..	145	363	427	206
	80..	145	413	477	256
ME..77MK37	63..	132	415	472	199
	71..	145	415	479	199
	80..	145	465	529	249
	90..	197	485	570	269
ME..87MK57	63..	132	410	467	199
	71..	145	410	474	199
	Y80..	145	460	524	249
	90..	197	480	565	269
	100L1	197	530	615	319
	100L2	197	560	645	349
ME..97MK77	63..	132	410	467	199
	71..	145	410	474	199
	80..	145	460	524	249
	90..	197	480	565	269
	100L1	197	530	615	319
	100L2	197	560	645	349
	112M	221	565	645	354

安装尺寸

Mounting Dimensions

联接法兰尺寸

Adapter dimensions

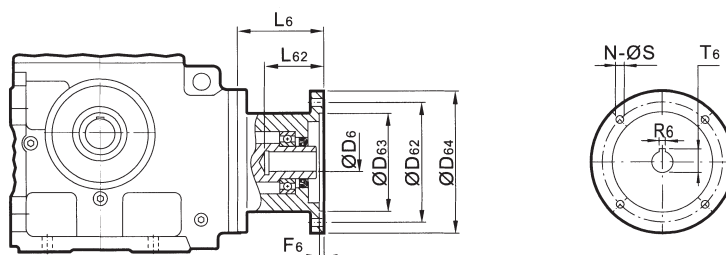

减速机规格 Gear unit size	电机规格 Motor frame	D ₆	T ₆	R ₆	F ₆	L ₆	L ₆₂	D ₆₄	D ₆₂	D ₆₃	N	S
ME...37 ME...47 ME...57	63B5	11	12.8	4	3.5	83	26	140	115	95	4	10
	71B5	14	16.3	5	3.5	83	33	160	130	110	4	10
	80B5	19	21.8	6	4.5	103	43	200	165	130	4	12
	90B5	24	27.3	8	4.5	103	53	200	165	130	4	12
ME...67	63B5	11	12.8	4	3.5	83	26	140	115	95	4	10
	71B5	14	16.3	5	3.5	83	33	160	130	110	4	10
	80B5	19	21.8	6	4.5	103	43	200	165	130	4	12
	90B5	24	27.3	8	4.5	103	53	200	165	130	4	12
	100B5	28	31.3	8	5	110	63	250	215	180	4	15
	112B5	28	31.3	8	5	110	63	250	215	180	4	15
ME...77	63B5	11	12.8	4	3.5	83	26	140	115	95	4	10
	71B5	14	16.3	5	3.5	83	33	160	130	110	4	10
	80B5	19	21.8	6	4.5	103	43	200	165	130	4	12
	90B5	24	27.3	8	4.5	103	53	200	165	130	4	12
	100B5	28	31.3	8	5	110	63	250	215	180	4	15
	112B5	28	31.3	8	5	110	63	250	215	180	4	15
	132B5	38	41.3	10	5	133	85	300	265	230	4	15
ME...87	80B5	19	21.8	6	4.5	103	43	200	165	130	4	12
	90B5	24	27.3	8	4.5	103	53	200	165	130	4	12
	100B5	28	31.3	8	5	110	63	250	215	180	4	15
	112B5	28	31.3	8	5	110	63	250	215	180	4	15
	132B5	38	41.3	10	5	133	85	300	265	230	4	15
	160B5	42	45.3	12	6	171	115	350	300	250	4	19
ME...97	100B5	28	31.3	8	5	110	63	250	215	180	4	15
	112B5	28	31.3	8	5	110	63	250	215	180	4	15
	132B5	38	41.3	10	5	133	85	300	265	230	4	15
	160B5	42	45.3	12	6	171	115	350	300	250	4	19
	180B5	28	31.3	8	5	110	63	250	215	180	4	15

注意!

- 1 选用底脚安装减速机时,尺寸 $\varnothing D_{64}$ 可能超过底脚安装面, 请注意校核。
- 2 适配电机参照IEC B5法兰规格, 其它未注尺寸请参考相关机型号

Attention!


- 1 Dimension $\varnothing D_{64}$ may protrude past foot mounting surface if selecting foot-mounted type.
- 2 the motor flange follow IEC B5 type,dimensions is not indicated,please refer to relative gear unit size

安装尺寸

Mounting Dimensions

输入轴尺寸

Input Shaft Dimensions

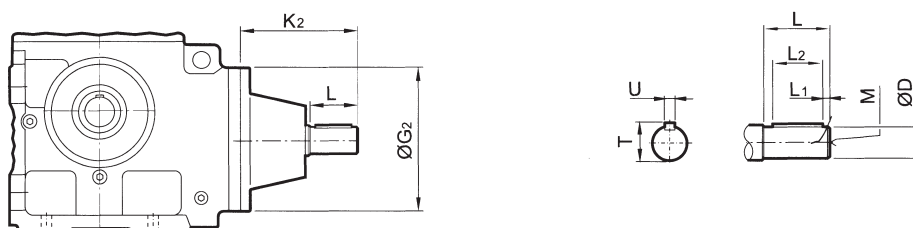

减速机规格 Gear unit size	D	G2	K2	L	M	L ¹	L ²	T	U
ME..37S	16k6	120	115	40	M5	4	32	18	5
ME..47S	16k6	120	115	40	M6	4	32	18	6
ME..57S	16k6	120	115	40	M6	4	32	18	6
ME..67S	19k6	160	120	40	M6	4	32	21.5	6
ME..77S	24k6	200	140	50	M8	5	40	27	8
ME..87S	28k6	250	180	60	M10	5	50	31	8
ME..97S	38k6	300	220	80	M12	5	70	41	10

注意!

其他未注尺寸请参考相关机型号.

Attention!

Please refer to the relative size for those unlabelled data